

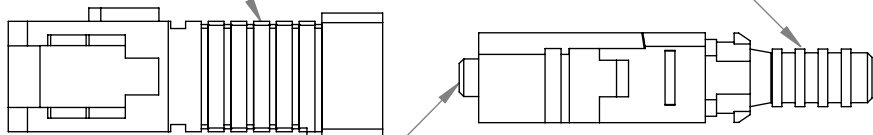


FIBER CONNECTOR
OUTER HOUSING

SC/PC FIBER CONNECTOR INSERT
WITH SPRING LOADED FERRULE

900 μ m FURCATION TUBING
STRAIN RELIEF BOOT

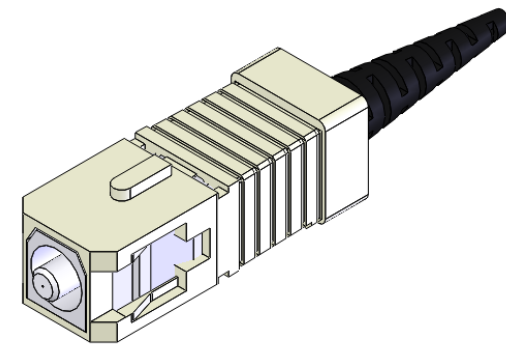


FERRULE INNER DIAMETER
128 μ m +3/-0 μ m


EXPLODED VIEW




CRIMP SLEEVE
USE ONLY WITH 3.0mm FURCATION
TUBING AND BOOT



3.0mm FURCATION TUBING
STRAIN RELIEF BOOT

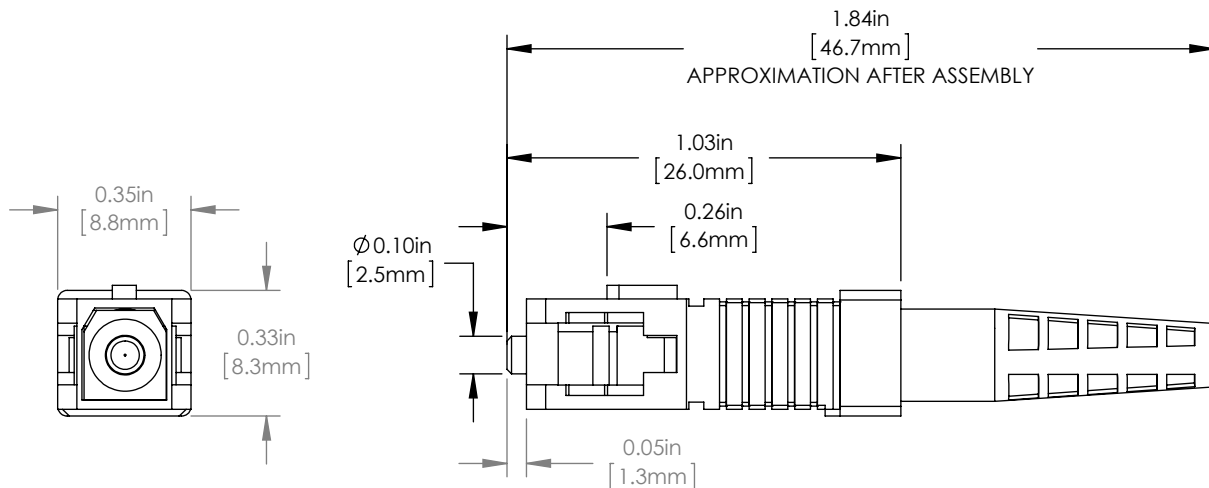

ASSEMBLED WITH 3mm FIBER BOOT

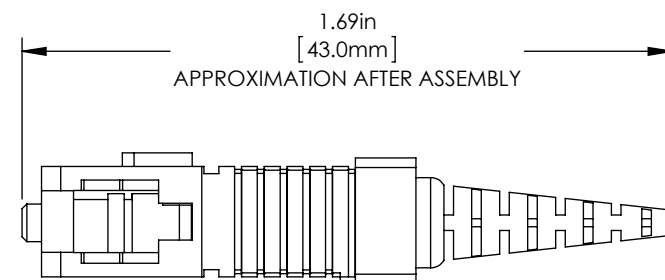

ASSEMBLED WITH 900 μ m FIBER BOOT

INCLUDED BUT NOT SHOWN:
• PROTECTIVE DUST CAP

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING
PROJECTION



	NAME	DATE
DRAWN	PH	01/28/2013
APPROVAL	KAH	01/29/2013

COPYRIGHT © 2013 BY THORLABS
VALUES IN PARENTHESIS ARE CALCULATED
AND MAY CONTAIN ROUND OFF ERRORS

THORLABS
www.thorlabs.com

SC/PC MULTIMODE CONNECTOR

MATERIAL N/A REV B

ITEM # 30126H1 APPROX WEIGHT 4 g