

## Tunable Laser Gain Chip with TEC



SAF1176S

### Description

The SAF1176S 1550 nm Single-Angled-Facet (SAF) gain chip (AR-coated laser diode) features an angled waveguide, AR coating, and a proven gain structure, which gives designers of external cavity lasers (ECLs) the highest power and widest tuning range available in the market. The butterfly assembly features a TEC and an optical isolator to improve the stability of the laser.

### Laser Cavity Performance\*

\*Different external laser cavities will produce different performance specifications. The data given here is only valid for the specified reference cavity.



		SAF1176S		
		Min	Typical	Max
Reference Laser Cavity		Littrow Cavity: TLK-L1550R		
Center Wavelength		1530 nm	1550 nm	1570 nm
Tuning Range <sup>a</sup>		70 nm	120 nm	-
Peak Power		10 mW	30 mW	-
Wavelength Tuning Resolution		-	-	1 pm
Tuning Speed		-	-	40 nm/s
Linewidth		-	100 kHz	130 kHz
Side Mode Suppression Ratio (SMSR)		30 dB	45 dB	-
Polarization Extinction Ratio		-	-	-
Power Stability <sup>b</sup>	30 s	1%	-	-
	24 hr	10%	-	-
Wavelength Stability <sup>b</sup>	30 s	-	-	1 pm
	24 hr	-	-	50 pm


<sup>a</sup> 10 dB, <sup>b</sup> Running open loop, measured using ITC4020 current controller.

### ASE Performance

T<sub>OP</sub> = 28 °C

		SAF1176S		
		Min	Typical	Max
Center Wavelength		1500 nm	1550 nm	1600 nm
3 dB Bandwidth		60 nm	80 nm	-
Operating Current		-	300 mA	-
Chip Forward Voltage		-	1.1 V	1.4 V
Gain Ripple, RMS <sup>a</sup>		-	-	0.4 dB
Power, Front Facet <sup>b</sup>		0.4 mW	-	-


<sup>a</sup> @ I<sub>OP</sub>, <sup>b</sup> Measured using OSA with 0.1 nm resolution bandwidth; <sup>b</sup> Free-space output power

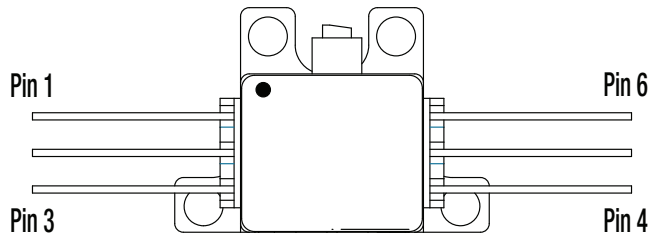

- | Pin Identification |              |
|--------------------|--------------|
| 1.                 | TEC +        |
| 2.                 | Thermistor   |
| 3.                 | Thermistor   |
| 4.                 | Dev. Anode   |
| 5.                 | Dev. Cathode |
| 6.                 | TEC -        |

## Additional Specifications

	SAF1176S		
	Min	Typical	Max
Chip Gain <sup>a</sup>	-	17 dB	-
Angled Facet Reflectivity <sup>b</sup> ( $R_1$ )	-	0.005%	0.01%
Normal Facet Reflectivity ( $R_2$ )	8%	10%	12%
Lateral Beam Exit Angle	-	19.5°	-
Beam Divergence (FWHM)	$\theta_T$	27°	31°
	$\theta_L$	14°	17°
Operating Current <sup>c</sup>	-	300 mA	500 mA
Operating Temperature (Non-Condensing)	-	25 °C	-
TEC Forward Voltage	-	-	3.6 V
TEC Forward Current	-	-	2.1 A
Chip Length	-	1 mm	-
Waveguide Refractive Index	-	3.2	-
Astigmatism	-	1 $\mu$ m	3 $\mu$ m
Fiber Type	SMF-28e, 1.5 m Long		
Fiber Connector	FC/APC		
Peak Optical Isolation	32 dB <sup>d</sup>	-	-
Fiber Coupling Efficiency	-	50%	-

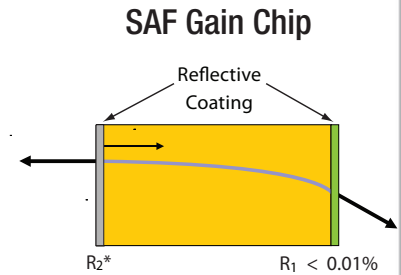

\* $R_2$  is between 10 and 30%, depending on model.

<sup>a</sup> Single pass optical gain at center of gain curve; <sup>b</sup> SAF chip reflectivity diagram (see above); <sup>c</sup> @  $T_{op}$ ; <sup>d</sup> @ 1550 nm, 23 °C

## Graphs

