


NOTES:

1. SUBSTRATE MATERIAL:
N-BK7
2. BEAM DEVIATION: ± 3 arcmin
3. COATING (APPLY ACROSS CLEAR APERTURE)

S1, S2, S3 & S4: R(abs) < 0.25% @ 1064nm
 S5: T_p/T_s > 1000:1 @ 1064nm
 TRANSMISSION > 95%
 REFLECTION > 99.5%


- 4. FINE GROUND SURFACE
- 5. ELEMENTS TO BE CEMENTED WITH NORLAND OPTICAL ADHESIVE 61
- 6. PROTECTIVE BEVEL AS NEEDED
- 7. MARK IDENTIFIES BEAMSPLITTER COATING RIGHT ANGLE PRISM

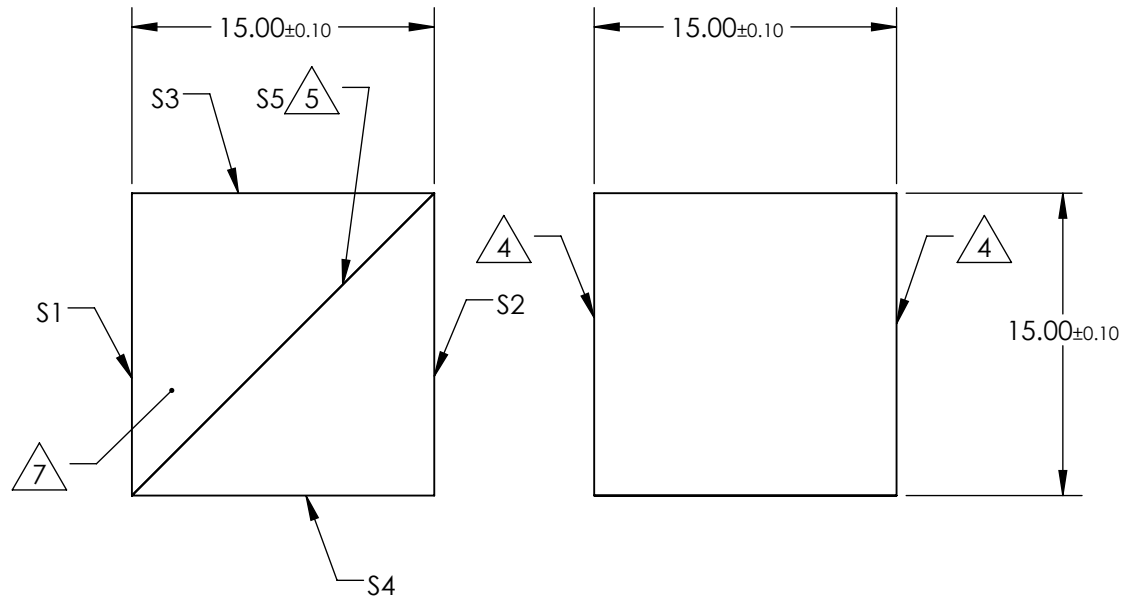

**FOR INFORMATION ONLY:
 DO NOT MANUFACTURE
 PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
 DIMENSIONS ARE FOR REFERENCE ONLY

	S1, S2, S3, S4	S5
SHAPE	PLANO	PLANO
SURFACE FLATNESS	$\lambda/4$	$\lambda/4$
SURFACE QUALITY	40-20	40-20
CLEAR APERTURE	90	90

THIRD ANGLE PROJECTION 

ALL DIMS IN mm

EO® Edmund Optics®

TITLE: 15mm, 1064nm, LASER LINE POLARIZING CUBE BEAMSPLITTER

DWG NO: 48578

SHEET 1 OF 1