
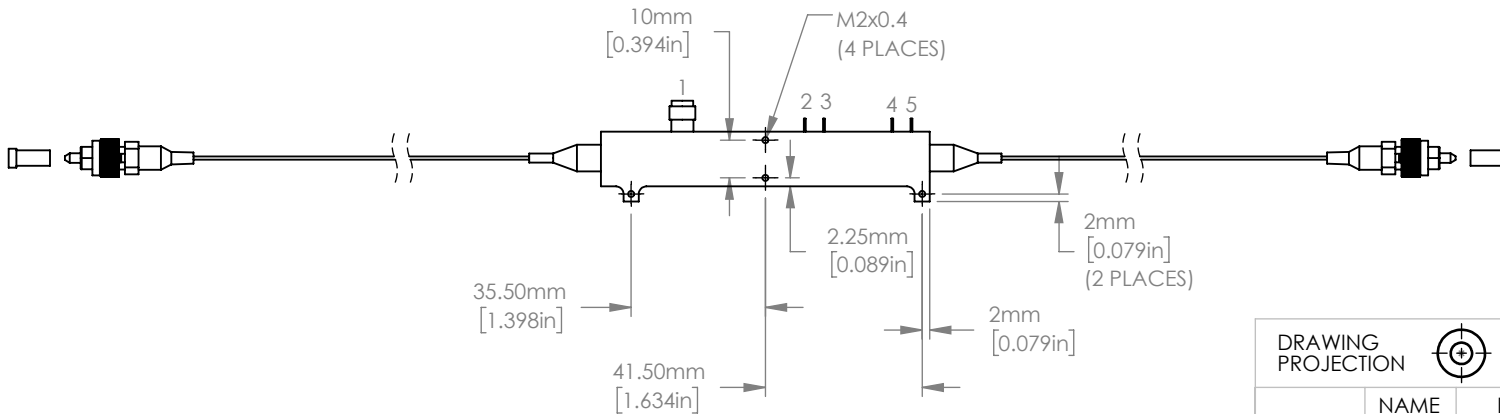
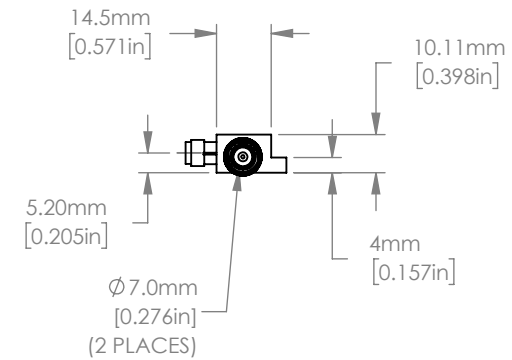
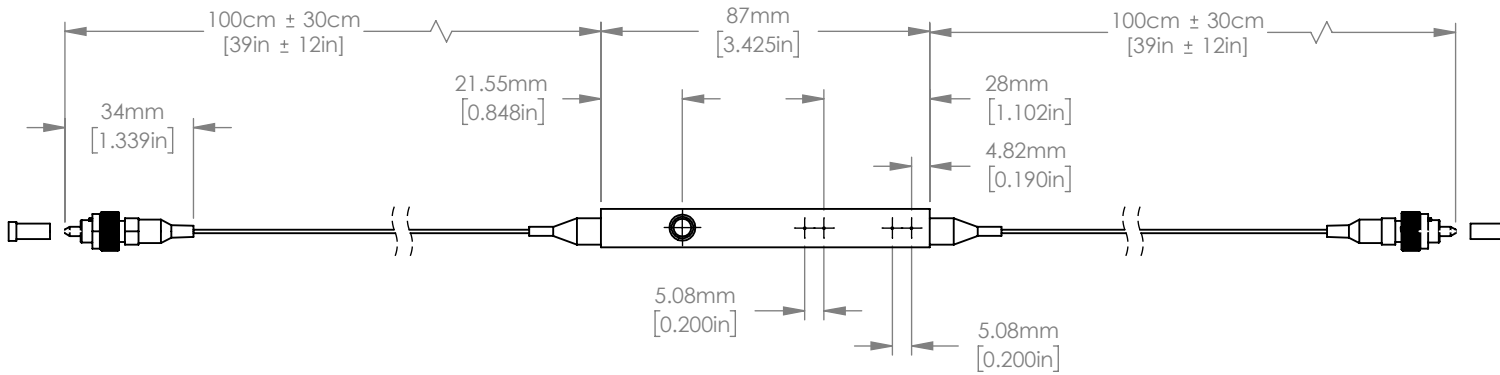
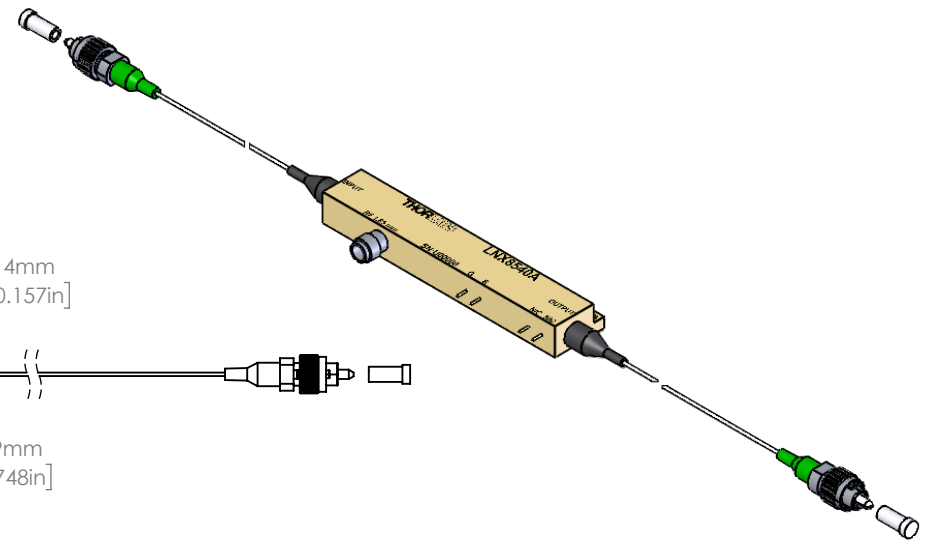


STANDARD INPUT/OUTPUT FIBERS	
FIBER TYPE	PM
CONN. TYPE	FC/APC
KEY	NARROW
KEY ALIGNMENT	SLOW AXIS

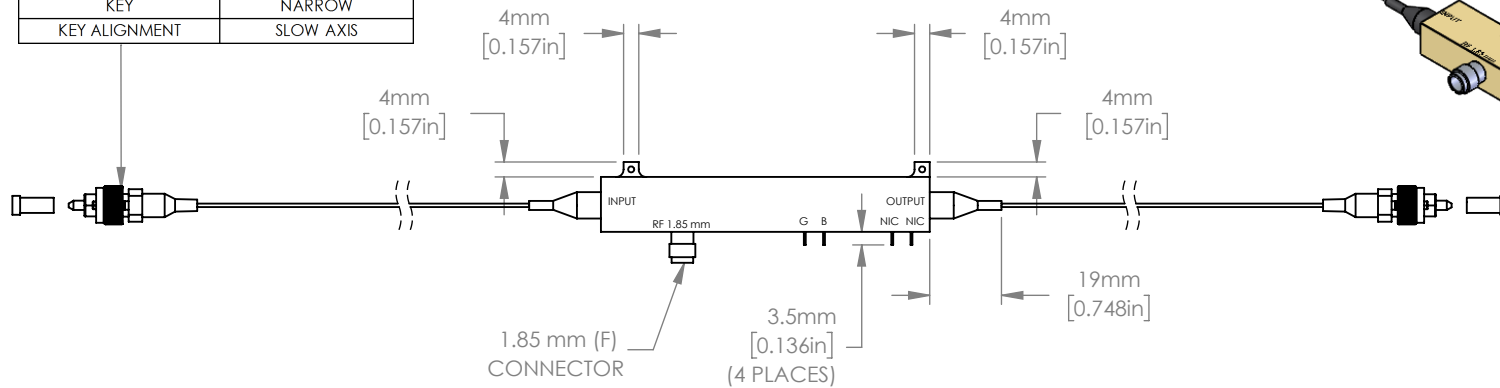

- PINOUT:
1. RF INPUT
 2. GROUND
 3. DC BIAS
 4. NO INTERNAL CONNECTION
 5. NO INTERNAL CONNECTION

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION			 		THORLABS www.thorlabs.com	
NAME			DATE			
DRAWN PG			4/19/2022			
APPROVAL DH			4/19/2022			
COPYRIGHT © 2022 BY THORLABS						
VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUND OFF ERRORS						
			MATERIAL		REV	
			N/A		A	
			ITEM #		APPROX WEIGHT	
			LNK8540A		82 g	