
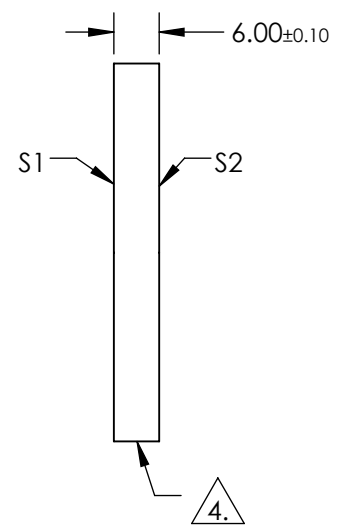


NOTES:

1. SUBSTRATE: UV GRADE FUSED SILICA
2. COATING (APPLY ACROSS COATING APERTURE)
 S1 & S2: RABS ≤0.25% @ 880nm
 RAVG ≤1.25% @ 400 - 870nm
 RAVG ≤1.25% @ 890 - 1000nm
3. SURFACE S2 TO BE PARALLEL TO SURFACE S1 WITHIN <5 ARCSEC
4. FINE GRIND SURFACE
5. RoHS COMPLIANT

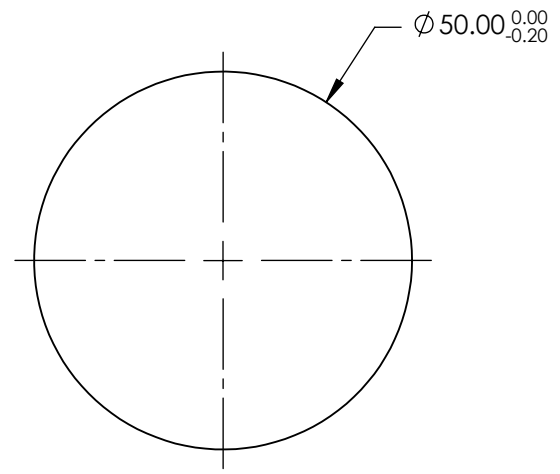

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	20-10	20-10
CLEAR APERTURE	Ø40.00	Ø40.00
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED



EO[®] Edmund Optics[®]	
TITLE	50mm DIA., 6mm THICK, VIS-NIR COATED λ/10 FUSED SILICA WINDOW
DWG NO	36956
ALL DIMS IN	mm
	SHEET 1 OF 1