
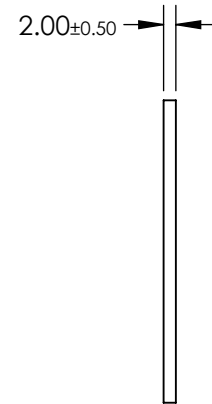
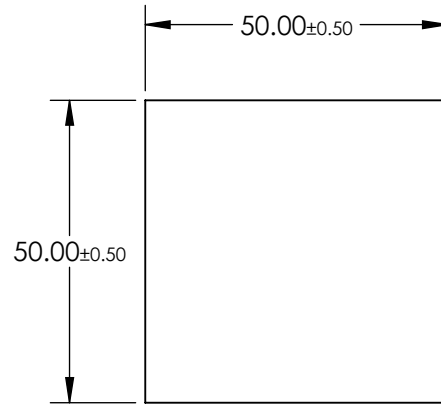


**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

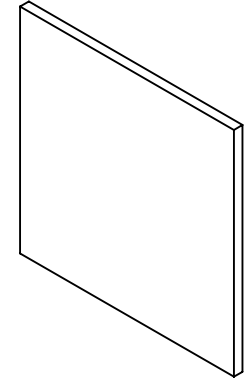

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

SUBSTRATE	Fused Silica
GROOVE DENSITY (grooves/mm)	1200
WAVELENGTH RANGE (nm)	250 - 450
BLAZE ANGLE	26.7°
RoHS	COMPLIANT

EO® Edmund Optics®



ALL DIMS IN

mm

TITLE

1200 Grooves/mm, 50mm Sq, UV Transmission
Grating Beamsplitter

DWG NO

85300

SHEET
1 OF 1