
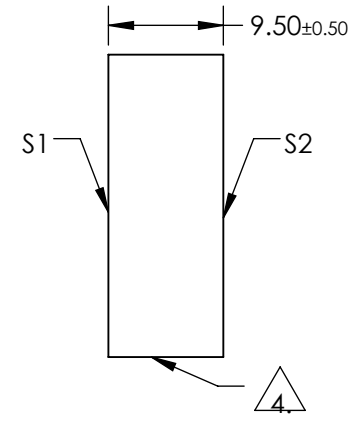
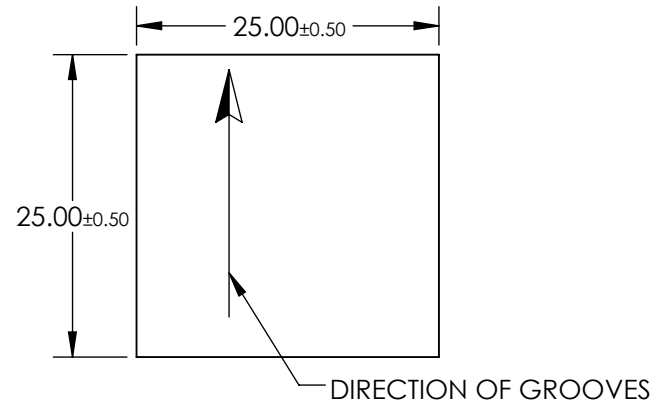


NOTES:

1. SUBSTRATE MATERIAL:
FLOAT GLASS
2. COATING (APPLW ACROSS CLEAR APERTURE):
S1: BARE ALUMINUM
S2: NONE
3. BLAZE ANGLE: 13° 00'
NOMINAL BLAZE WAVELENGTH: 750nm
EFFICIENCY: 60-80% @ BLAZE WAVELENGTH

4. EDGES GROUND
5. RoHS COMPLIANT

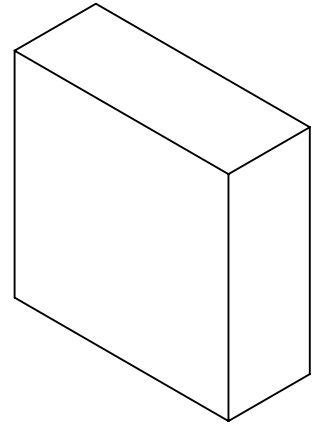

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY



| | | | | | | | |
|----------------|-------------|-------------|------------------------|----|--------|----------------------------------|--------------|
| | S1 | S2 | THIRD ANGLE PROJECTION | | TITLE | GRATING DIFF 600GR 750nm 25 x 25 | |
| SHAPE | PLANO | PLANO | ALL DIMS IN | mm | DWG NO | 41028 | SHEET 1 OF 1 |
| CLEAR APERTURE | 22.5 x 22.5 | 22.5 x 22.5 | | | | | |