

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

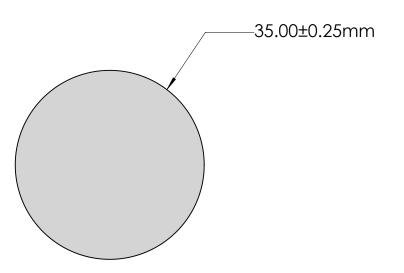

-1.00±0.10mm

SPECIFICATION	VALUE		
SUBSTRATE	Sapphire (Al2O3)		
CLEAR APERTURE	≥90%		
SURFACE FLATNESS	2λ (typical)		
SURFACE ROUGHNESS	0.1µm per Inch		
SURFACE QUALITY	80-50		
PARALLELISM	≤3.5 arcmin		
BIREFRINGENCE	0.008		
AXIS ORIENTATION	Random		
COATING	Uncoated		
WAVELENGTH RANGE	200 - 5500nm		



		Edmund Optics ®					
EFL (AT 587.6nm)	NA	TITLE	35.0mm Diameter Uncoated, Sapphire Window				
BFL (AT 587.6nm)	NA	DWG NO.	48920				
ALL DIMS IN	mm	SCALE	NONE	SHEET 1 OF 1	SHEET SIZE: A	CAD SYS: Solidworks	