
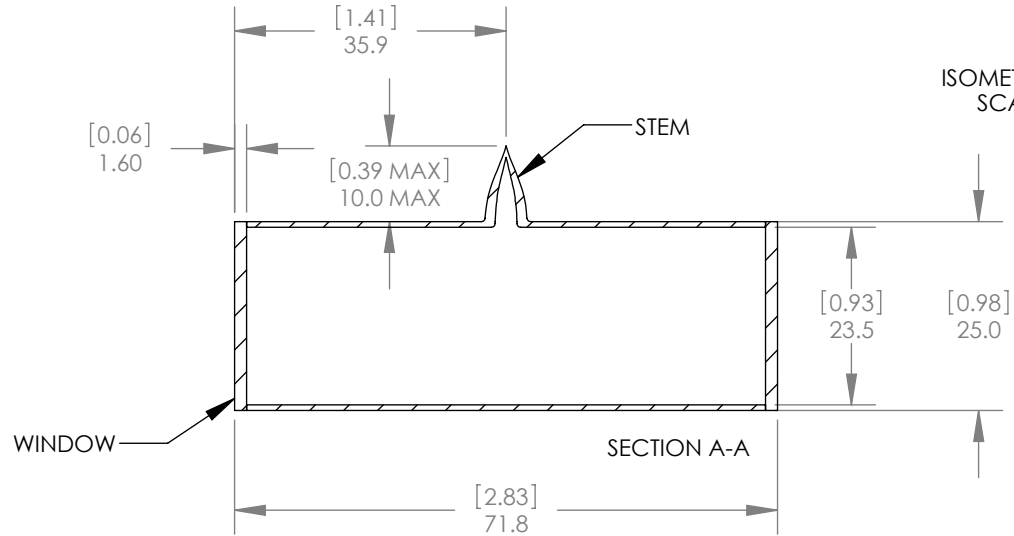


ISOMETRIC VIEW  
SCALE 1:1

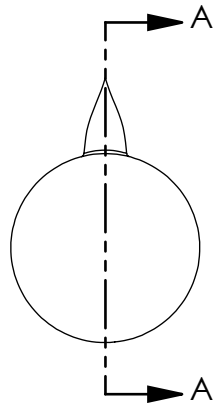

NOTES/SPECIFICATIONS:

1. BODY THICKNESS: 1.5mm
2. DIAMETER TOLERANCE:  $\pm 1.6$ mm
3. DIMENSIONAL TOLERANCE:  $\pm 0.8$ mm
4. PRESSURE @ 25°C:  $>10^{-7}$  TORR
5. STEM HEIGHT:  $<10$ mm
6. WINDOW ANGLE: 0°
7. WINDOW TYPE: FLAT
8. WINDOW THICKNESS: 1.6mm
9. WINDOW SURFACE QUALITY: 60-40 SCRATCH-DIG
10. MINIMUM TRANSMISSION:  $>84\%$
11. GAS: SODIUM Na
12. WAVELENGTH: 589nm
- 13.
14. ALL DIMENSIONS ARE IN  $\begin{matrix} [\text{in}] \\ \text{mm} \end{matrix}$

FOR INFORMATION ONLY  
NOT FOR MANUFACTURING PURPOSES

DRAWING  
PROJECTION



	NAME	DATE
DRAWN	MG	22/MAR/11
APPROVAL	WD	22/MAR/11

COPYRIGHT © 2010 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED  
AND MAY CONTAIN ROUND-OFF ERRORS

**THORLABS**

www.thorlabs.com

PYREX REF. CELL		REV
Ø25 mm x 71.8 mm, SODIUM [Na]		C
MATERIAL	PYREX/SCHOTT BOROFLOAT	
ITEM #	CP25075-NA	APPROX WEIGHT
		0.06 kg