
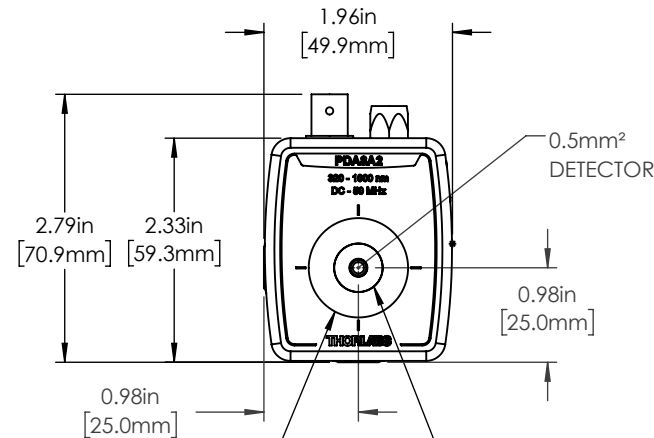
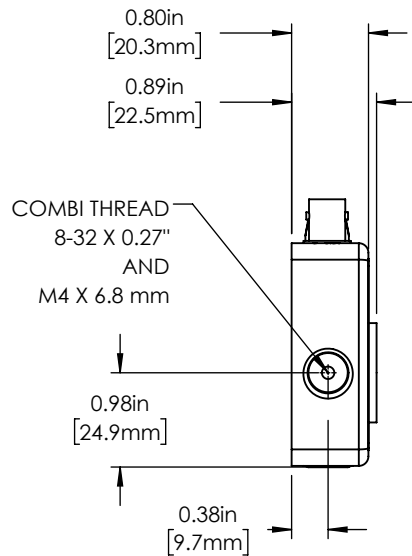



OUTPUT BNC WITH
0 - 2.0V RANGE

POWER INPUT CONNECTOR
LUMBERG RKM 3/0.5M



SM1(1.035-40) EXTERNAL THREAD
2.1mm (0.085") DEPTH


SM05(0.535-40) INTERNAL THREAD
1.9mm (0.076") DEPTH




POWER SWITCH

POWER INDICATOR
LED


ELECTRICAL CONNECTIONS

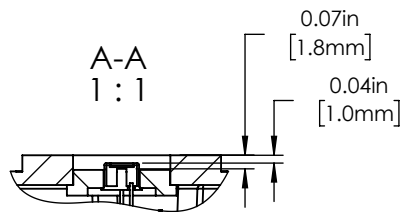

COMBI THREAD
8-32 X 0.27"
AND
M4 X 6.8 mm



0.38in
[9.7mm]

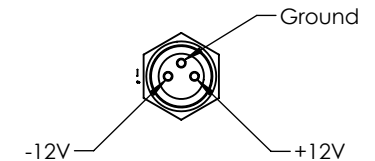

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING
PROJECTION



	NAME	DATE
DRAWN	MUR	08/04/19
APPROVAL	ARU	09/04/19

COPYRIGHT © 2019 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED
AND MAY CONTAIN ROUND OFF ERRORS

THORLABS
www.thorlabs.com

Si AMPLIFIED DETECTOR

MATERIAL

N/A

REV
A

ITEM #

PDA8A2

APPROX WEIGHT

80 g