


Super L-Band Booster Optical Amplifier

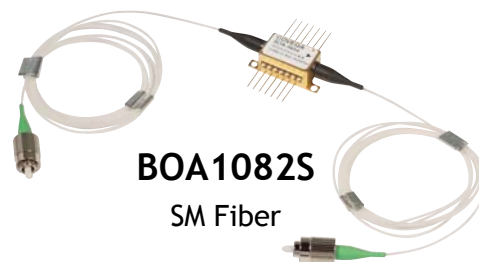

BOA1082S

SM Fiber

Description

Thorlabs' BOA1082S is a high saturation output power, high bandwidth, polarization-maintaining Booster Optical Amplifier. The BOA1082S incorporates a highly efficient InP/InGaAsP Quantum Well (QW) layer structure and a reliable ridge waveguide design. This BOA is housed in a standard 14-pin butterfly package with an integrated thermoelectric cooler (TEC) and thermistor.



Specifications

$T_{CHIP} = 25\text{ }^{\circ}\text{C}$, $T_{CASE} = 0 - 70\text{ }^{\circ}\text{C}$

BOA1082S				
	Symbol	Min	Typical	Max
Operating Current	I_{OP}	-	600 mA	750mA
Center Wavelength	λ_C	1600 nm	1625 nm	1650 nm
Optical 3 dB Bandwidth	BW	70 nm	80 nm	-
Saturation Output Power @ -3 dB	P_{SAT}	10 dBm	13 dBm	-
Small Signal Gain @ $P_{IN} = -20\text{ dBm}$, $\lambda = 1620\text{ nm}$	G	14 dB	18 dB	-
Gain Ripple (RMS) @ I_{op}	δG	-	0.05 dB	0.3 dB
Noise Figure	NF	-	8.5 dB	9.5 dB
Forward Voltage	V_F	-	1.5 V	2.0 V
TEC Operation (Typical / Max @ $T_{CASE} = 25\text{ }^{\circ}\text{C} / 70\text{ }^{\circ}\text{C}$)				
TEC Current	I_{TEC}	-	0.12 A	1.5 A
TEC Voltage	V_{TEC}	-	0.25 V	4 V
Thermistor Resistance	R_{TH}	-	10 k Ω	-



Performance Plots

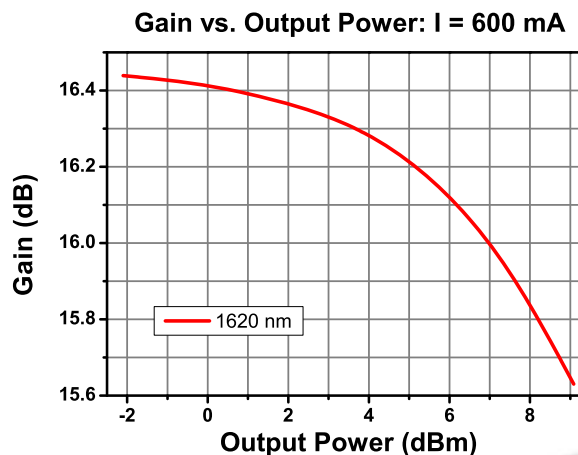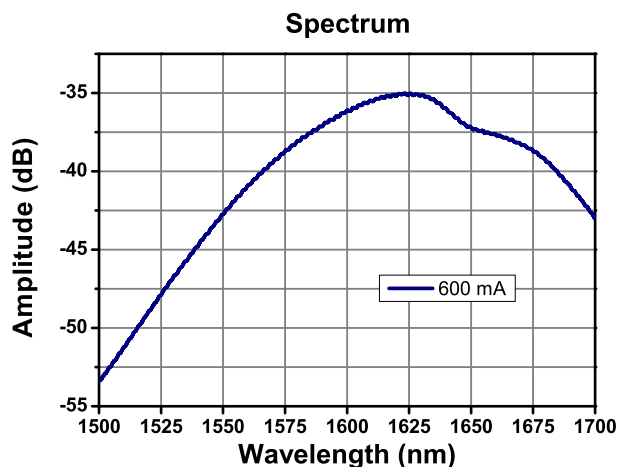

Drawings

T. Case

1. TEC +	8. NC
2. Thermistor	9. NC
3. NC	10. Dev Anode
4. NC	11. Dev Cathode
5. Thermistor	12. NC
6. NC	13. Case
7. NC	14. TEC -

