
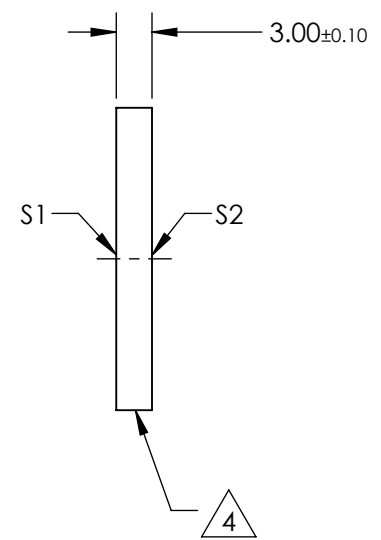
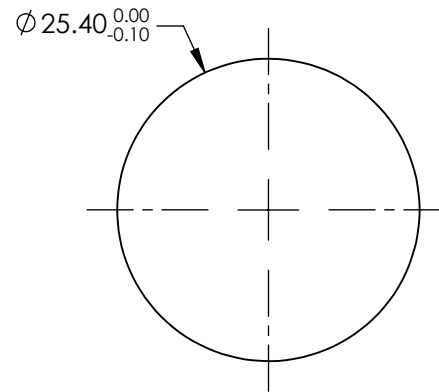


NOTES:

1. SUBSTRATE:
VACUUM UV GRADE CaF₂
2. SURFACE S2 TO BE PARALLEL WITH S1 TO < 1 ARCMIN
3. COATING (APPLY ACROSS CLEAR APERTURE)
S1 & S2: NONE
4. FINE GRIND SURFACE



**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2					
SHAPE	PLANO	PLANO					
SURFACE FLATNESS	$\lambda/2$	$\lambda/2$	THIRD ANGLE PROJECTION	TITLE		25.4mm Dia., 3mm Thick Uncoated, Calcium Fluoride Window	
SURFACE QUALITY	40-20	40-20					
CLEAR APERTURE	Ø22.86	Ø22.86	ALL DIMS IN	mm	DWG NO	11874	SHEET 1 OF 1
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED					