NOTES:

SUBSTRATE


GORILLA® GLASS


2. COATING (APPLY ACROSS COATING APERTURE) \$1 & \$2: 1/4 WAVE MgF2 @ 550nm R(AVG) < 1.75% FROM 400 - 700nm




FINE GRIND SURFACE

ROHS COMPLIANT



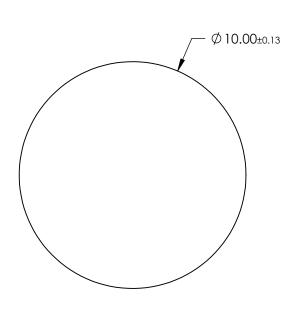

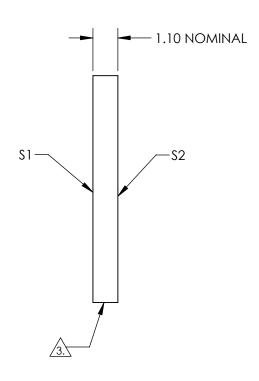

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2	
SHAPE	PLANO	PLANO	
SURFACE QUALITY	80-50	80-50	
CLEAR APERTURE	9.00	9.00	
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	

			Edmund Optic	;S®
THIRD ANGLE PROJECTION		TITLE	10mm Diameter, MgF2 Coated, Gor Glass® Window	illa
ALL DIMS IN	mm	DWG NO	22849	SHEET 1 OF

	•			
LE	10mm Diameter, MgF2 Coated, Gorilla Glass® Window			
/G NO	22849	SHEET 1 OF 1		