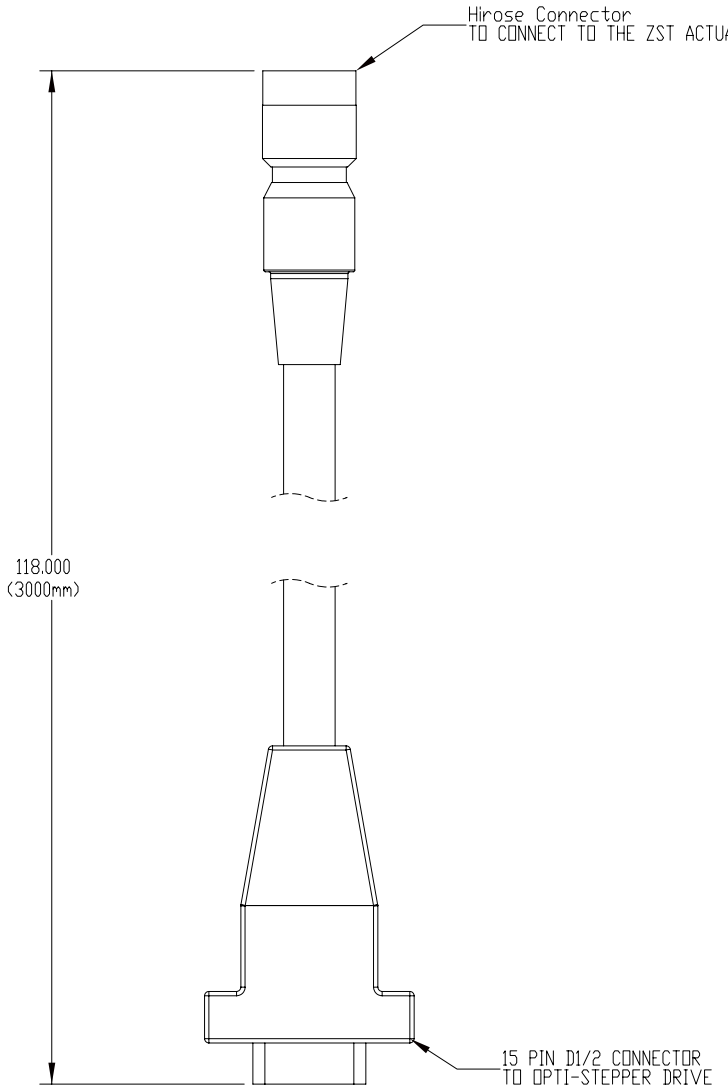



HIROSE CONNECTOR

1	N/C
2	ph A+
3	ph A-
4	ph B+
5	ph B-
6	CCW L/S
7	CW L/S
8	GND
9	N/C
10	N/C



DB15 CONNECTOR

1	GND
2	CCW L/S
3	CW L/S
4	ph B-
5	ph B+
6	ph A -
7	ph A+
15	LINK TO PIN1

TOLERANCES

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
LINEAR TOLERANCES:
TWO PLACE DECIMAL: ±0.010
THREE PLACE DECIMAL: ±0.005
ANGULAR: ±30'
SURFACE FINISH: 32 MICROINCHES
PARALLELISM: 0.002
FLATNESS: 0.002
STRAIGHTNESS: 0.002
CONCENTRICITY: 0.002
PERPENDICULARITY: 0.002
THREAD: CLASS 2 FIT

	NAME	DATE
DRAWN	JPS	02/22/06
ENG APPR.	JMM	02/22/06
MFG APPR.	JMM	02/22/06

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF THORLABS, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF THORLABS, INC. IS PROHIBITED.

THORLABS INC. PO BOX 366 NEWTON NJ

TITLE: ZST TO OPS CABLE CONNECTOR

MATERIAL: N/A

SIZE: A

REV.: A

SCALE: 1:1

SHEET 1 OF 1

DWG. NO. 14279-E01

PART NO. ZST-CAB2

5 4 3 2 1