




Optical Input

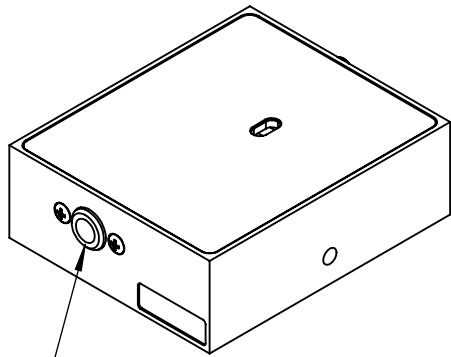

12mm
[0,47in]

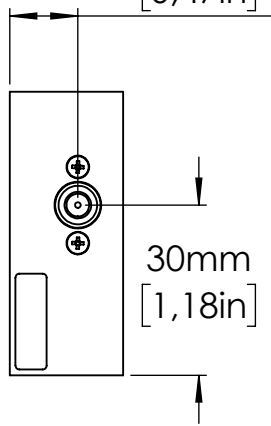


30mm
[1,18in]

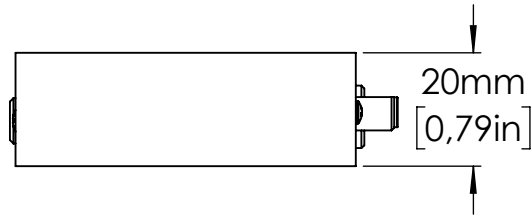


20mm
[0,79in]

60mm
[2,36in]

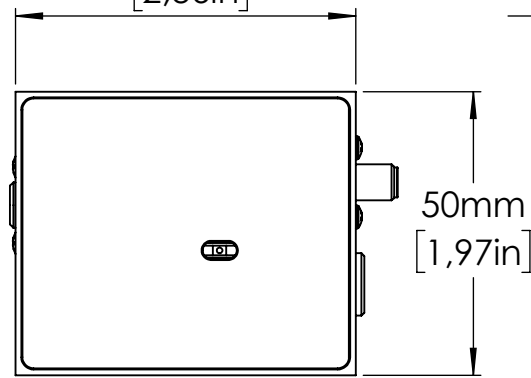

50mm
[1,97in]

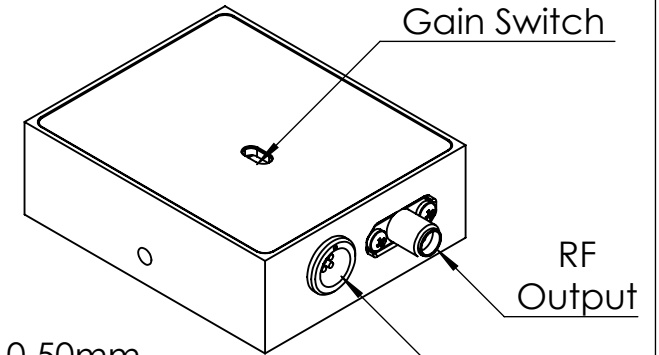


Gain Switch

RF Output

Supply

10,50mm
[0,41in]

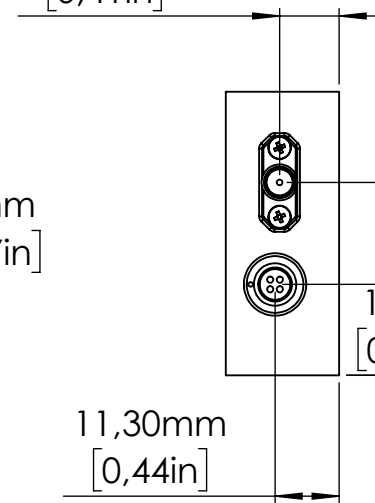


34mm
[1,34in]

16mm
[0,63in]

11,30mm
[0,44in]

M4 Mounting hole,
5,5mm deep

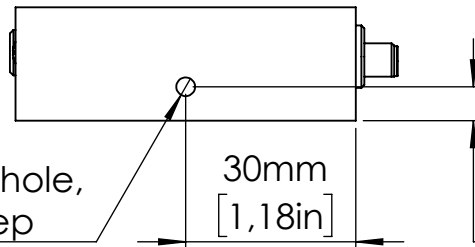

30mm
[1,18in]

6mm
[0,24in]

Drawing Projection

	DATE	NAME
PREPARED	02.08.2017	AW
CHECKED		

MenloSystems

Tel.: 089/189 166-0
Fax: 089/189 166-111

ITEM:

High Sensitivity Fast
Photodetector

MATERIAL:

DOC NO.

FPD310-FS-VIS

The copying, distribution and utilization of this document as well as the communication of its content to others without expressed authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or ornamental design registration.