

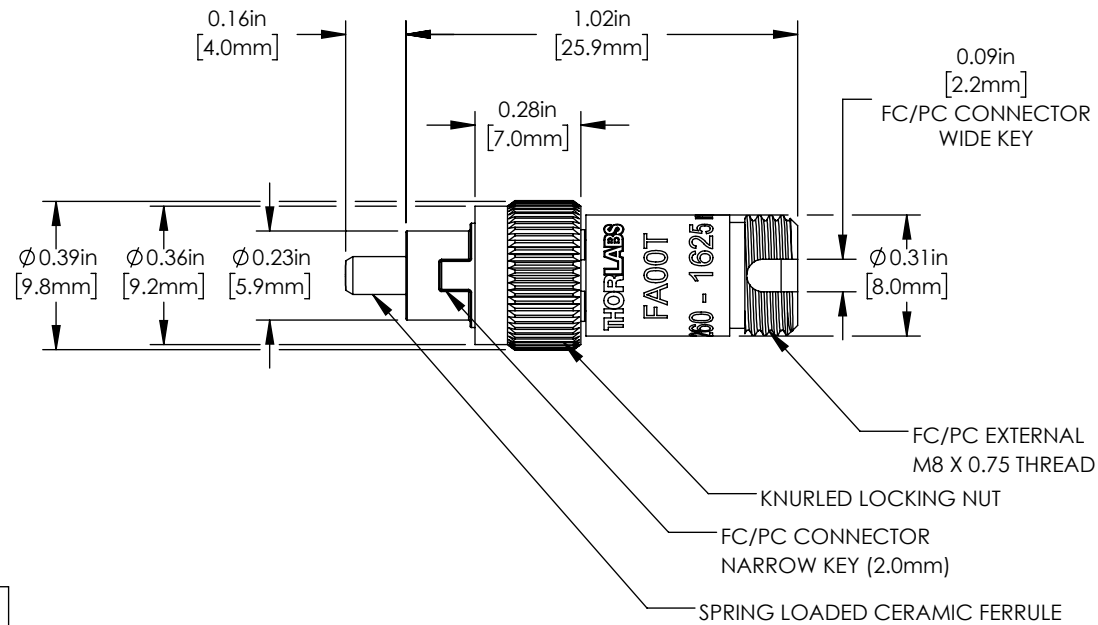


ISOMETRIC VIEW  
SCALE 2:1



SPECIFICATIONS	
WAVELENGTH RANGE	1260 - 1625nm
INSERTION LOSS, TYPICAL	≤0.4dB
RETURN LOSS	≥40dB
MAX POWER CAPABILITY	500mW
POLARIZATION DEPENDENT LOSS	≤0.1dB
OPERATION TEMPERATURE	-40 to 85°C

INCLUDED BUT NOT SHOWN:  
1 PROTECTIVE DUST CAP FOR FERRULE  
1 PROTECTIVE DUST CAP FOR BULKHEAD

FOR INFORMATION ONLY  
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION						<b>THORLABS</b> www.thorlabs.com	
	NAME	DATE		FIXED OPTICAL ATTENUATOR/SACRIFICIAL INTERFACE, 1260 - 1625 nm, FC/PC CONNECTOR			
DRAWN	ZJ	23/JAN/18		MATERIAL		N/A	
APPROVAL	KH	30/JAN/18		ITEM #		FA00T	
COPYRIGHT © 2018 BY THORLABS <small>VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUND OFF ERRORS</small>				APPROX WEIGHT		0.009 kg	
						REV	A