
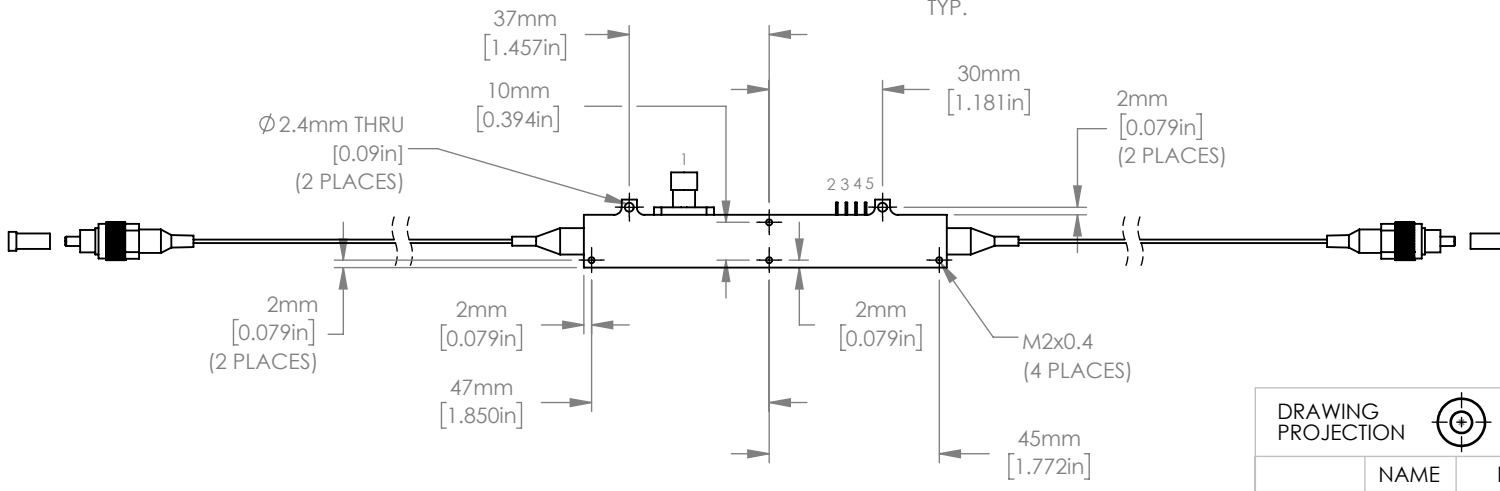
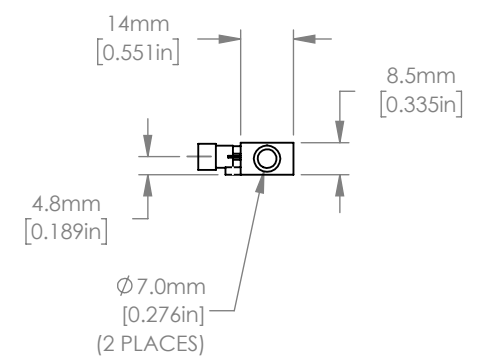
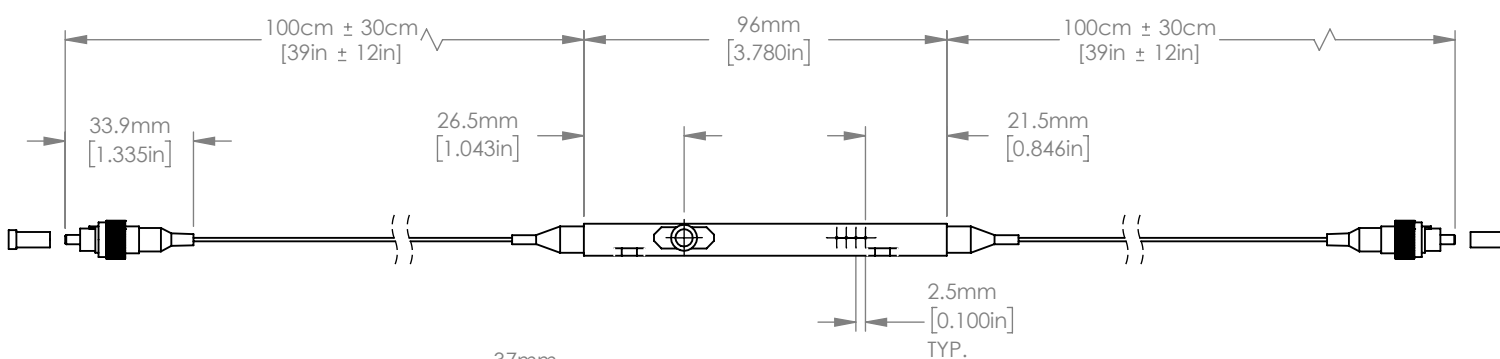
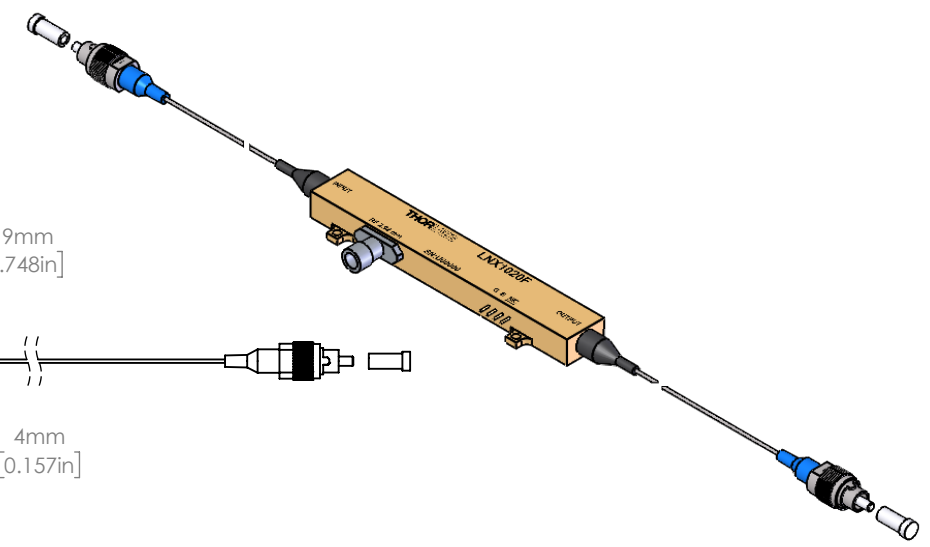


STANDARD INPUT/OUTPUT FIBERS	
FIBER TYPE	PM
CONN. TYPE	FC/PC
KEY	NARROW
KEY ALIGNMENT	SLOW AXIS

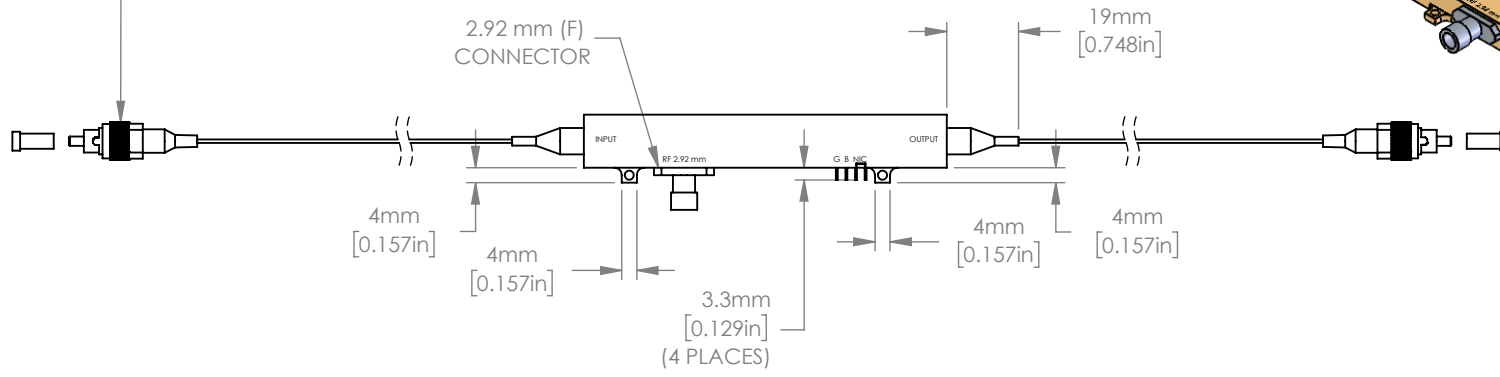

- PINOUT:
1. RF INPUT
 2. GROUND
 3. DC BIAS
 4. NO INTERNAL CONNECTION
 5. NO INTERNAL CONNECTION

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION				THORLABS www.thorlabs.com	
NAME	DATE	20 GHz INTENSITY MODULATOR FOR 1064 nm			
DRAWN	PG	6/09/2022	MATERIAL		REV
APPROVAL	DH	6/20/2022	N/A		A
COPYRIGHT © 2022 BY THORLABS					
VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUND OFF ERRORS			ITEM #	APPROX WEIGHT	
			LNX1020F	82 g	