
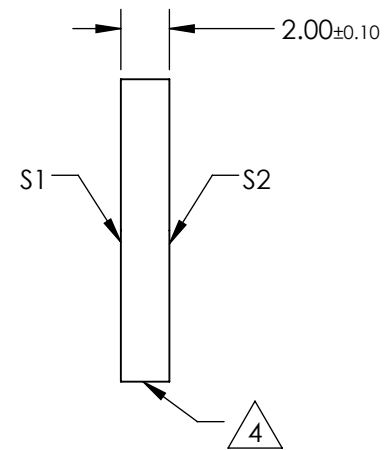
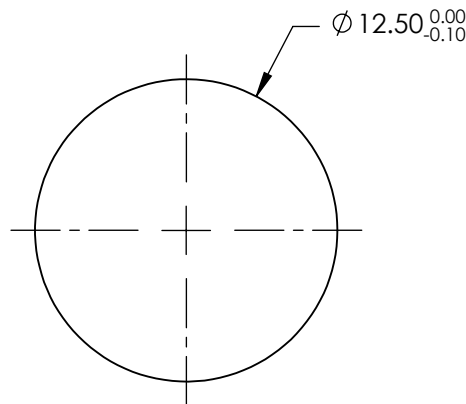


NOTES:

1. SUBSTRATE:
VACUUM UV GRADE CaF₂
2. SURFACE S2 TO BE PARALLEL WITH S1 TO <1 arcmin
3. COATING (APPLY ACROSS CLEAR APERTURE)
S1 & S2: R(AVG) < 1% FROM 1650-3000nm @ 0° AOI
R(ABS) < 2% FROM 1650-3000nm @ 0° AOI

4.  FINE GRIND SURFACE



**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	40-20	40-20
CLEAR APERTURE	Ø11.25	Ø11.25
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION 

ALL DIMS IN mm

 **Edmund Optics®**

TITLE

Ø12.5mm, BBAR(1650 - 3000nm), CALCIUM FLUORIDE WINDOW

DWG NO

15964

SHEET
1 OF 1