




NOTES:

1. SUBSTRATE MATERIAL:
FLOAT GLASS
2. COATING (APPLY ACROSS CLEAR APERTURE):
S1: BARE ALUMINUM
S2: NONE
3. WAVELENGTH RANGE: 400-700nm
ABSOLUTE DIFFRACTION EFFICIENCY: 45-65%
GROOVE DENSITY: 2400 grooves/mm



4. EDGES GROUND

5. ROHS COMPLIANT

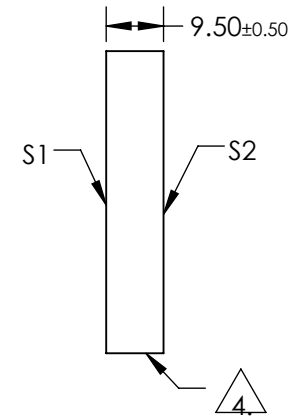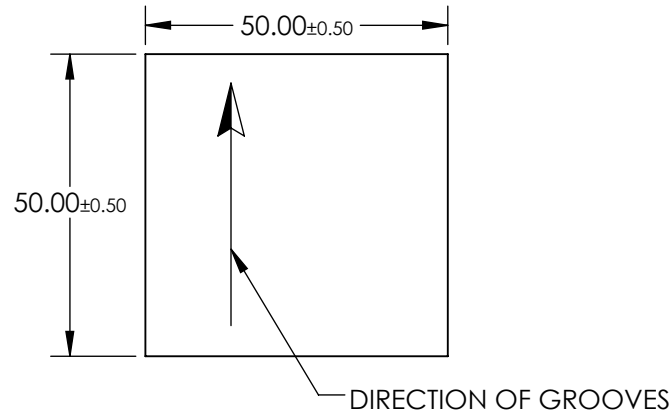

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

EO® **Edmund Optics**®

	S1	S2	THIRD ANGLE PROJECTION		TITLE	GRATING HOLO 2400GR VIS 50 X 50	
SHAPE	PLANO	PLANO	ALL DIMS IN	mm	DWG NO	43226	SHEET 1 OF 1
CLEAR APERTURE	45.0 x 45.0	N/A					