
|    | PART DESCRIPTION    | MATERIAL             |  |  |
|----|---------------------|----------------------|--|--|
| 1) | SM05RR              | ANODIZED<br>ALUMINUM |  |  |
| 2  | LA1540-B            | N-BK7                |  |  |
| 3  | ENGRAVED<br>HOUSING | ANODIZED<br>ALUMINUM |  |  |



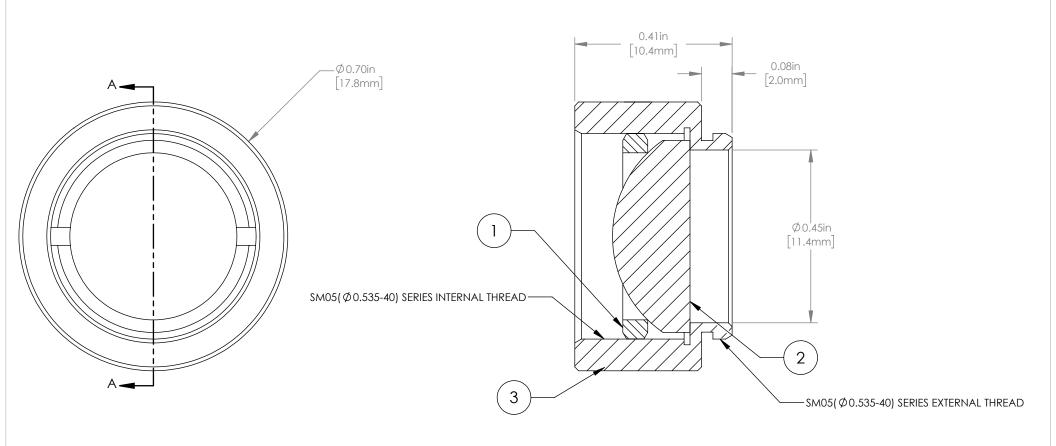

## NOTES/SPECIFICATIONS:

- 1. 2. 3. 4. 5. 6. 7.
- DESIGN WAVELENGTH: 587.6nm
  FOCAL LENGTH: f=14.9mm±1%
  WORKING DISTANCE (REF): 8.8mm
  CLEAR APERTURE: >Ø11.4mm
  SURFACE QUALITY: 40-20 SCRATCH-DIG
  CENTRATION: <3crcmin
  COATING: BBAR Ravg<0.5% FROM 650-1050nm, AOI: 0°,

## FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES

| DRAWING PROJECTION   |      |             | THORLARS www.thorlabs.com  |           |     |
|--|------|-------------|----------------------------|-----------|-----|
|  | NAME | DATE        | Ø 1/2" MOUNTED PLANO CONVI |           | VEX |
| DRAWN  | GG   | 07/SEP/17   | LENS, f=15mm, -B COAT      |           |     |
| APPROVAL   | DD   | 07/SEP/17   | MATERIAL                   |           | RE\ |
| COPYRIGHT © 2017 BY THORLABS   |      | BY THORLABS | SEE TABLE                  |           | В   |
| VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS |      |             | ITEM #<br>LA 1 540-B-ML    | APPROX WE | iGH |