
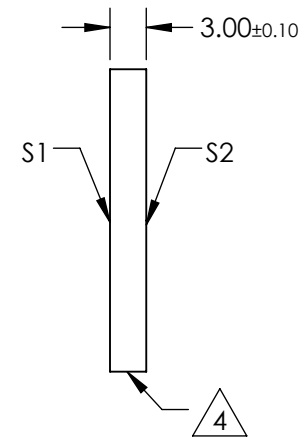
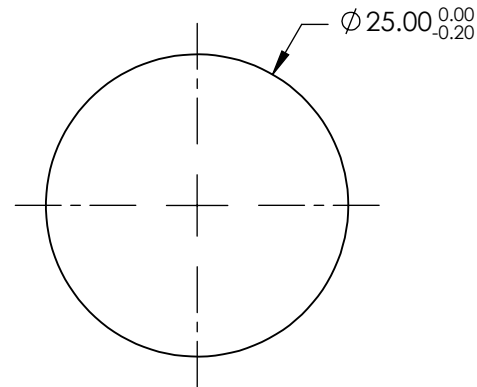


NOTES:


1. SUBSTRATE: UV GRADE FUSED SILICA
2. COATING (APPLY ACROSS CLEAR APERTURE)  
 S1 & S2: RABS  $\leq 1.0\%$  @ 350 - 450nm  
 RAVG  $\leq 1.5\%$  @ 250 - 700nm
3. SURFACE S2 TO BE PARALLEL WITH S1 TO  $< 5$  ARCSEC
4. FINE GRIND SURFACE
5. RoHS COMPLIANT



**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	20-10	20-10
CLEAR APERTURE	Ø20.00	Ø20.00
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED



TITLE	25mm DIA., 3mm THICK, UV-VIS COATED $\lambda/10$ FUSED SILICA WINDOW
DWG NO	48066
SHEET 1 OF 1	