

S5FC1108S

# Benchtop Superluminescent Light Source

## Description

The Thorlabs Fiber Coupled SLD Source provides easy coupling and simple control of a COVEGA TQE Superluminescent Diode (SLD). Each system is equipped with a single FC/APC connector output. The drive electronics feature an independent, high-precision, low-noise, constant-current source and a temperature control unit. An intuitive LCD interface allows the user to view and set current and temperature parameters independently. The S5FC includes a universal power supply allowing operation over 100 to 240 VAC without the need for selecting the line voltage and is supplied with a US line cord as well as a standard European line cord. The fuse access is conveniently located on the rear panel. The SLD offered here is an indium phosphide (InP) device coupled to a SM fiber. For added safety, the system is designed to meet 3B laser class requirements.



SLDs are excellent high power broadband light sources for use as ASE Light Sources and in applications like Optical Coherence Tomography (OCT) Imaging Systems and Fiber Optic Gyroscopes (FOG).

## Specifications

Optical Specifications	Min	Typ	Max
Operating Current (mA)		450	550
Center Wavelength (nm)	1530	1550	1570
ASE Power (mW)	2	2.5	
Optical Bandwidth (nm)	85	90	




Performance Specifications	Value
Current Set Point Resolution	0.1 mA
Temperature Adjust Range	20.00 to 30.00 °C
Temp Set Point Resolution	±0.01 °C
Noise, (Typical Source Dependent)	<0.1%
Rise Time / Fall Time	1.4 μsec / 1.6 μsec
Modulation Input	0 - 5 V = 0 - Full Power
Modulation Bandwidth	250 kHz Full Depth of Modulation

General Specification	Value
AC Input	100 - 240 VAC, 50 - 60 Hz
Input Power	20 VA Max
Fuse Ratings	250 mA
Fuse Type	IEC60127-2/III (250 VA, Slow Blow Type 'T')
Fuse Size	5 mm x 20 mm
Dimensions (W x H x D)	5.8" x 11.4" x 2.6" (146 mm x 290 mm x 66 mm)
Weight	5 lbs (9.1 lbs Shipped Weight)
Operating Temperature	15 to 35 °C
Storage Temperature	0 to 50 °C

Connections and Controls	
Interface Control	Optical Encoder with Pushbutton
Enable Select	Keypad Switch with LED Indicator
Power On	Key Switch
Fiber Ports	FC/PC
Display	LCD, 16x2
Input Power Connection	IEC Connector
Modulation Input Connector	BNC (Referenced to Chassis)
Interlock	100 mil Header

Communications	
Communications Port	USB 2.0
Com Connection	USB Type B connector
Required Cable	2 m USB Type A to B Cable (Replacement Item# USB-A-79)

## Drawings

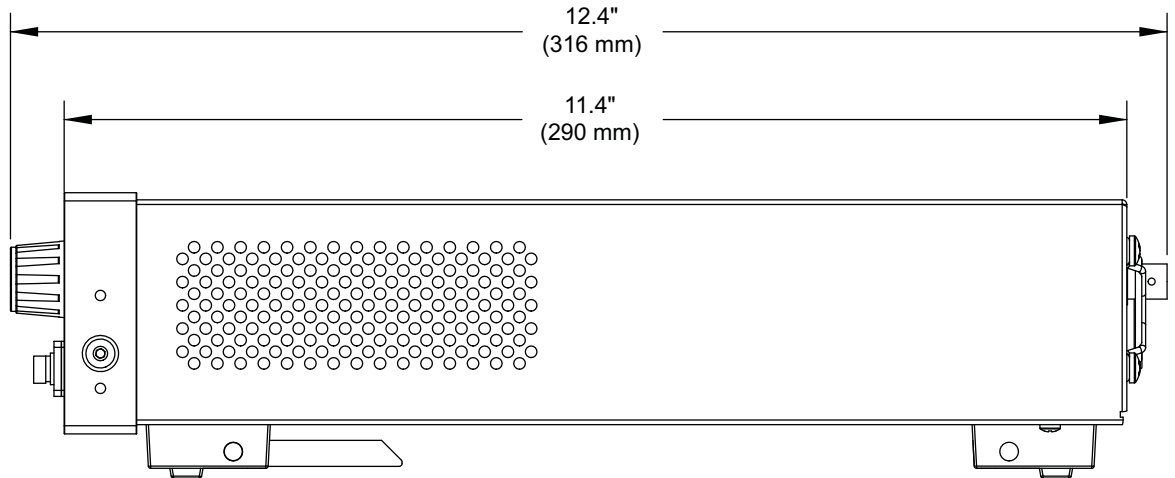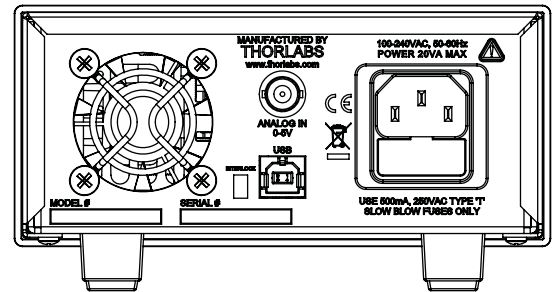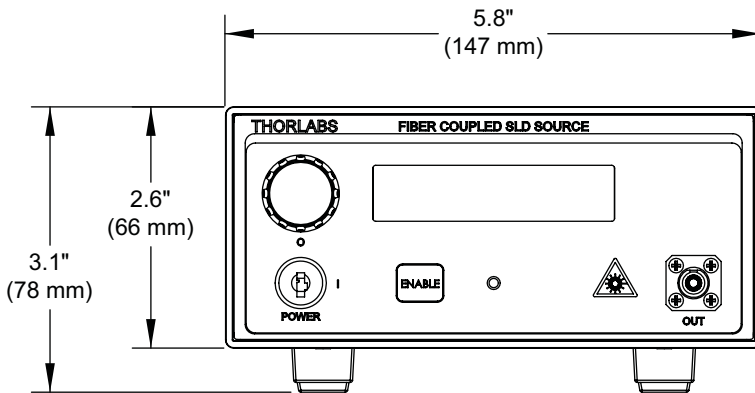

**USA, Canada, & S. America**  
 Thorlabs, Inc.  
 435 Route 206  
 Newton, NJ 07860, USA  
 Tel: 973-579-7227  
 Fax: 973-300-3600  
 www.thorlabs.com  
 email: feedback@thorlabs.com

**Europe**  
 Thorlabs GmbH  
 Hans-Böckler-Str. 6  
 85221 Dachau, Germany  
 Tel: +49-(0)8131-5956-0  
 Fax: +49-(0)8131-5956-99  
 www.thorlabs.com  
 email: Europe@thorlabs.com

**UK and Ireland**  
 Thorlabs LTD.  
 1 Saint Thomas Place, Ely  
 Cambridgeshire CB7 4EX, GB  
 Tel: +44 (0)1353-654440  
 Fax: +44 (0)1353-654444  
 www.thorlabs.com  
 email: sales.uk@thorlabs.com

**Scandinavia**  
 Thorlabs Sweden AB  
 Box 141 94  
 400 20 Göteborg, Sweden  
 Tel: +46-31-733-30-00  
 Fax: +46-31-703-40-45  
 www.thorlabs.com  
 email: scandinavia@thorlabs.com

**Japan and Asia**  
 Thorlabs Japan Inc.  
 5-17-1, Ohtsuka  
 Bunkyo-ku, Tokyo 112-0012, Japan  
 Tel: +81-3-5977-8401  
 Fax: +81-3-5977-8402  
 www.thorlabs.jp  
 email: sales@thorlabs.jp

