

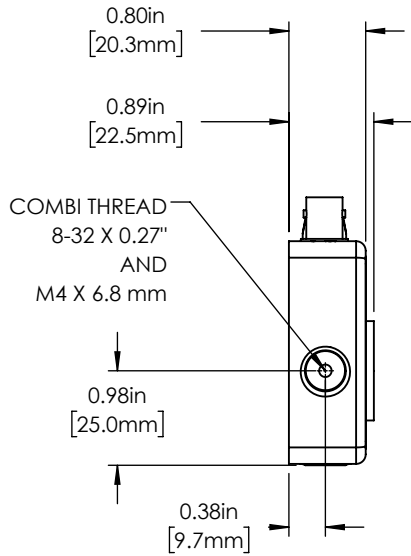



OUTPUT BNC WITH 0 - 10V RANGE

POWER INPUT CONNECTOR LUMBERG RKMf 3/0.5M

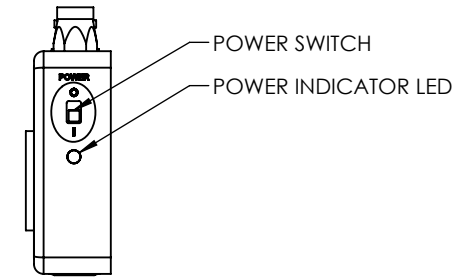




COMBI THREAD 8-32 X 0.27" AND M4 X 6.8 mm

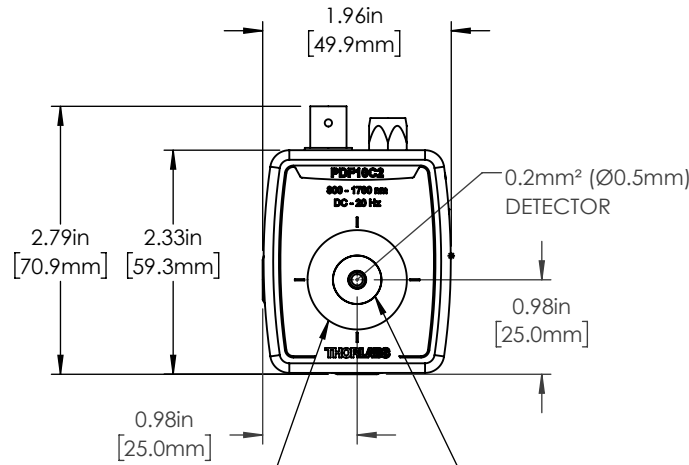

SM1 (1.035-40) EXTERNAL THREAD 2.1mm (0.085") DEPTH

SM05 (0.535-40) INTERNAL THREAD 1.9mm (0.076") DEPTH

ELECTRICAL CONNECTIONS

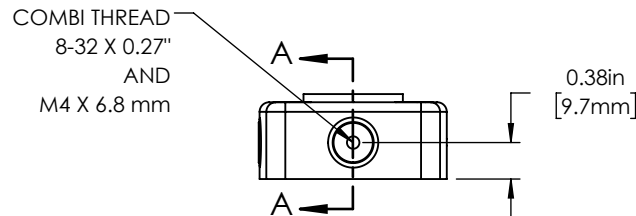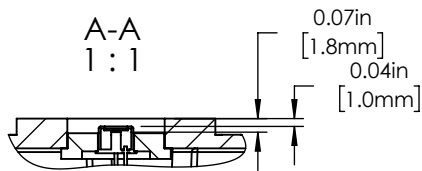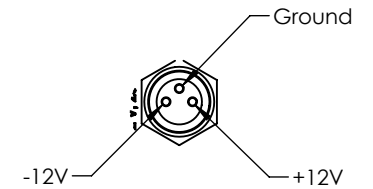

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION



	NAME	DATE
DRAWN	MUR	08/04/19
APPROVAL	ARU	09/04/19

COPYRIGHT © 2019 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUND OFF ERRORS

THORLABS
www.thorlabs.com

InGaAs AMPLIFIED DETECTOR

MATERIAL N/A REV A

ITEM # PDF10C2 APPROX WEIGHT 80 g