
	PART DESCRIPTION	MATERIAL
1	ENGRAVED HOUSING	ANODIZED ALUMINUM
2	SMIRR	ANODIZED ALUMINUM
(3)	LA1509-C	N-BK7



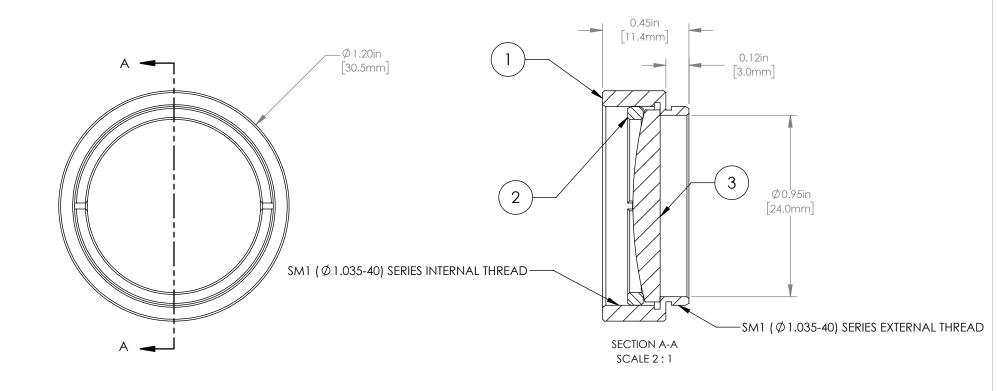

NOTES/SPECIFICATIONS:

- 1. 2. 3. 4. 5. 6.
- DESIGN WAVELENGTH: 587.6 nm FOCAL LENGTH: f=99.7 mm ± 1% WORKING DISTANCE: 93.5 mm CLEAR APERTURE: Ø 22.9 mm SURFACE QUALITY: 40-20 SCRATCH-DIG COATING: BBAR 1050-1700 nm, Ravg <0.5%, 0° AOI

FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION			THORLASS.com		
	NAME	DATE	MOUNTED Ø25.4 mm, f = 100.0 mm		nm
DRAWN	GG	22/AUG/19	PLANO CONVEX LENS, C COATED		
APPROVAL	DD	22/AUG/19	MATERIAL SEE TABLE		REV
COPYRIGHT © 2019 BY THORLABS		SY THORLABS	SEE IADLE		В
VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS		ARE CALCULATED	ITEM # LA 1509-C-ML	APPROX WE	IGHT
THE WITH CONTINUE ROOMS OF ERRORS		OTTE ENTORS	L/ (100/ C IVIL	, 9	