
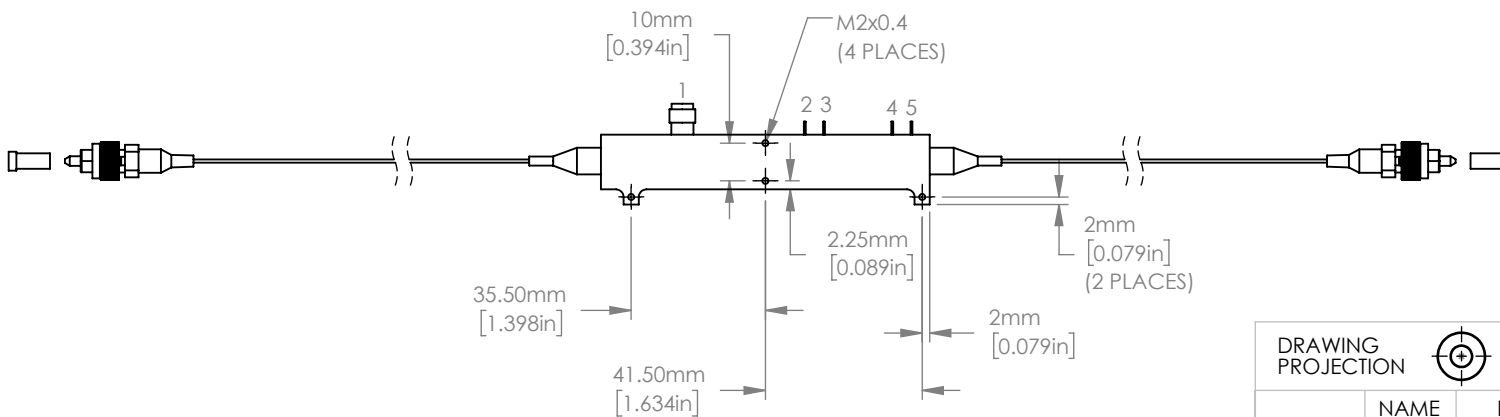
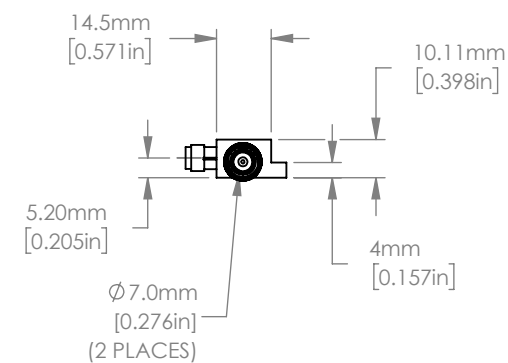
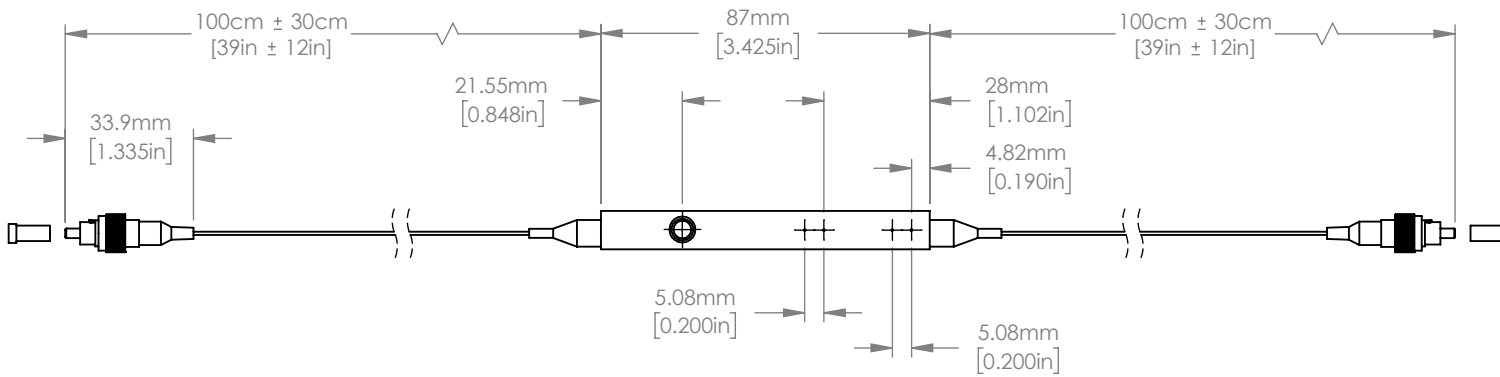


STANDARD INPUT/OUTPUT FIBERS	
FIBER TYPE	PM
CONN. TYPE	FC/PC
KEY	NARROW
KEY ALIGNMENT	SLOW AXIS

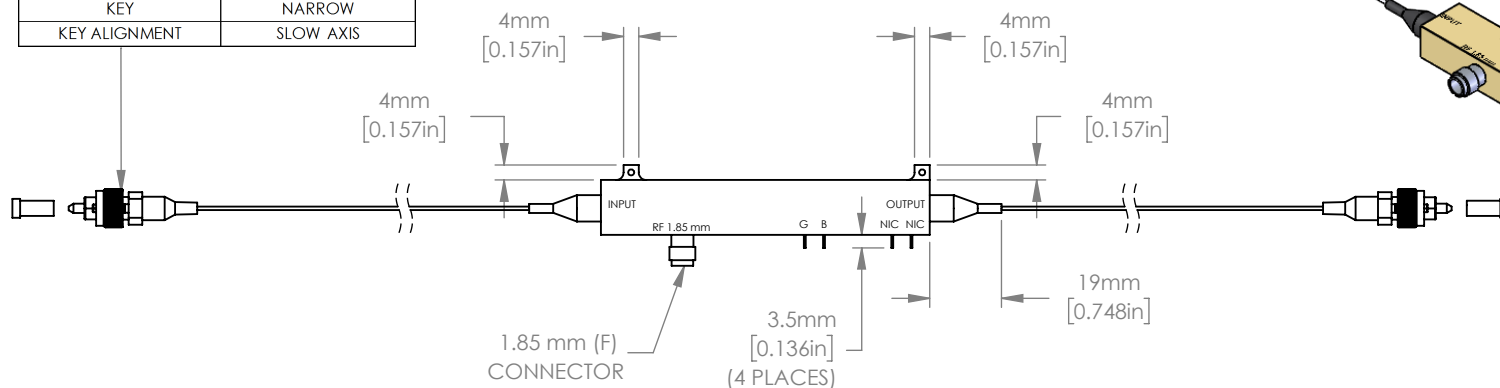

- PINOUT:
1. RF INPUT
  2. GROUND
  3. DC BIAS
  4. NO INTERNAL CONNECTION
  5. NO INTERNAL CONNECTION

FOR INFORMATION ONLY  
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
NAME	DATE	
DRAWN PG	4/19/2022	
APPROVAL DH	4/19/2022	
COPYRIGHT © 2022 BY THORLABS		
VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUND OFF ERRORS		

<b>THORLABS</b> www.thorlabs.com	
40 GHz INTENSITY MODULATOR FOR 850 nm	
MATERIAL	N/A
ITEM #	LNx8540F
APPROX WEIGHT	82 g