


FIBER SPECIFICATIONS*					
ITEM #	CORE DIAMETER	CLADDING DIAMETER	COATING DIAMETER	NA	WAVELENGTH RANGE
FG010LDA	10 ± 3 μm	125 ± 2 μm	245 ± 10 μm	0.10	400 - 550 nm AND 700 - 1000 nm

*SPECIFICATIONS BASED ON BARE-FIBER DATA

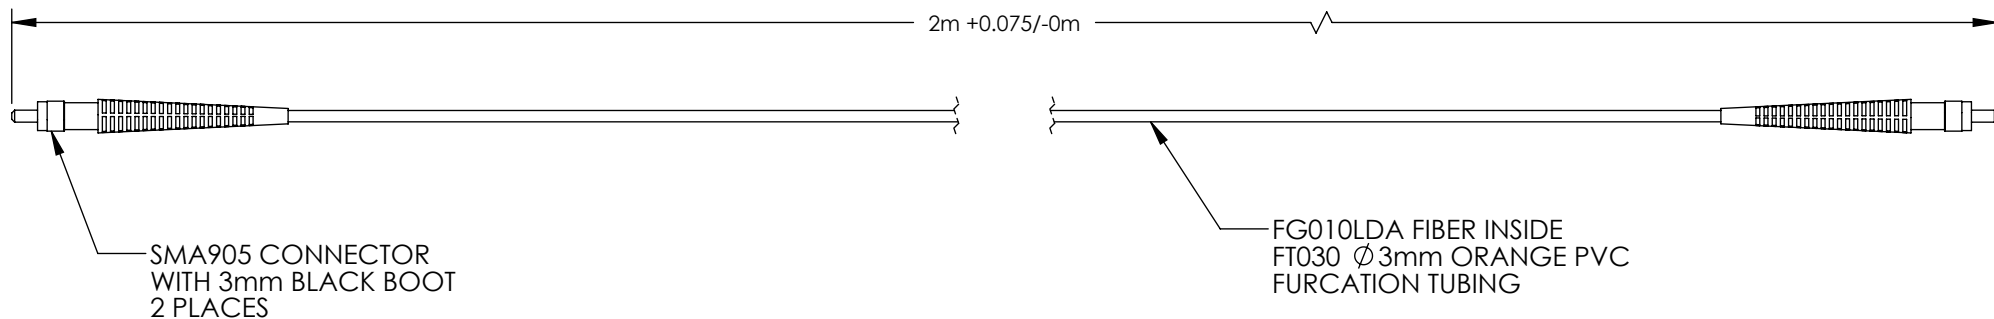

INCLUDED BUT NOT SHOWN:
• 2 RUBBER DUST CAPS

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION					THORLABS www.thorlabs.com	
	NAME	DATE	2m, 10μm, 0.10 NA, SMA CABLE			
DRAWN	JB	03/28/16	MATERIAL			
APPROVAL	BAG	06/FEB/19	N/A			REV D
COPYRIGHT © 2019 BY THORLABS			ITEM #		APPROX WEIGHT	
VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUND OFF ERRORS			M65L02		0.02 kg	