

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

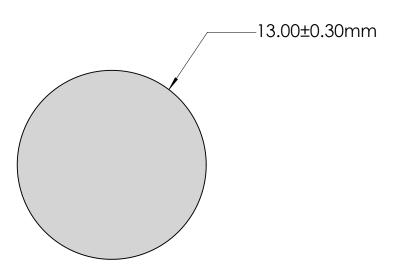

-0.50±0.10mm

SPECIFICATION	VALUE		
SUBSTRATE	Sapphire (Al2O3)		
CLEAR APERTURE	≥90%		
SURFACE FLATNESS	2λ (typical)		
SURFACE ROUGHNESS	0.1µm per Inch		
SURFACE QUALITY	80-50		
PARALLELISM	≤3.5 arcmin		
BIREFRINGENCE	0.008		
AXIS ORIENTATION	Random		
COATING	Uncoated		
WAVELENGTH RANGE	200 - 5500nm		



<b>CO</b>	Edmund	Optics <sup>®</sup>

		ı	1 12 mana Diama atar Una a arta di Caranabira Winday.				
	EFL (AT 587.6nm)	NA	TITLE	13mm Diameter Uncoated, Sapphire Window			
	BFL (AT 587.6nm)	NA	DWG NO.	43632			
	ALL DIMS IN	mm	SCALE	NONE	SHEET 1 OF 1	SHEET SIZE: A	CAD SYS: Solidworks