NOTES:

1. SUBSTRATE:

Sapphire (Al2O3)


FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING

- 2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN ≤3.5 ARCMIN
- 3. COATING (APPLY ACROSS CLEAR APERTURE)

\$1 & \$2: NONE

4. FINE GRIND SURFACE

5. ROHS COMPLIANT

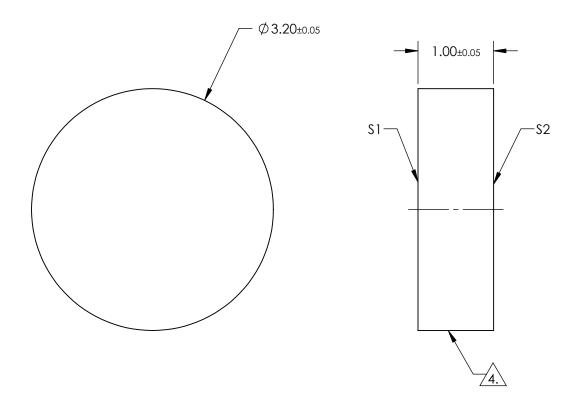

REV. A	\$1	S2		
SHAPE	PLANO	PLANO		
CLEAR APERTURE	Ø 2.88	Ø 2.88		
SURFACE FLATNESS	2λ (typical)	2λ (typical)		
SURFACE ROUGHNESS	≤0.1µm PER INCH	.1µm PER INCH ≤0.1µm PER INCH		
SURFACE QUALITY	80-50	80-50		
BIREFRINGENCE (n₀-ne)	0.008	0.008		
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED		

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

		<b>Edmund Optics®</b>			
THIRD ANGLE PROJECTION	$\bigoplus$	TITLE	3.20mm Dia., 1mm Thick, Uncoated, Sapphire Window		
ALL DIMS IN	mm	DWG NO	17217	SHEET 1 OF 1	