

NOTES:

1. SUBSTRATE: GRADE A FINE ANNEALED
SCHOTT: N-BK7 517/642
2. ROHS COMPLIANT
3. SURFACE S2 TO BE PARALLEL TO SURFACE S1 TO WITHIN 3 ARCMIN
4. COATING (APPLY ACROSS COATING APERTURE)
SPECIFICATIONS AT 45° AOI AND RANDOM POLARIZATION
S1:
 $R(\text{abs}) = 30\% \pm 5\% @ 550\text{nm}$
 $R(\text{abs}) = 30\% \pm 10\% \text{ FROM } 400\text{-}700\text{nm}$
 $T(\text{abs}) = 70\% \pm 5\% @ 550\text{nm}$
 $T(\text{abs}) = 70\% \pm 10\% \text{ FROM } 400\text{-}700\text{nm}$
 VISUAL COLOR = NEUTRAL


S2: BBAR
 $R(\text{abs}) \leq 2.0\% \text{ FROM } 400\text{-}700\text{nm}$
 $R(\text{avg}) \leq 1.0\% \text{ FROM } 400\text{-}700\text{nm}$



FINE GRIND SURFACE




MARK IDENTIFIES BEAMSPLITTER SURFACE

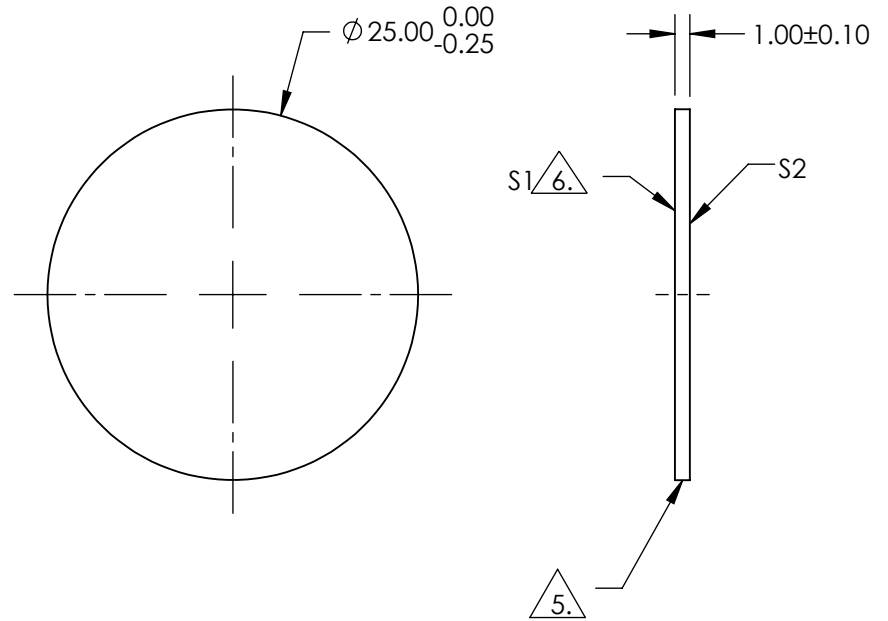

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

| | S1 | S2 |
|----------------------|----------------------|----------------------|
| SHAPE | PLANO | PLANO |
| SURFACE FLATNESS | 2λ PER mm | 2λ PER mm |
| SURFACE QUALITY | 60 - 40 | 60 - 40 |
| MIN CLEAR APERTURE | ∅ 21.25 | ∅ 21.25 |
| MIN COATING APERTURE | ∅ 21.25 | ∅ 21.25 |
| BEVEL | PROTECTIVE AS NEEDED | PROTECTIVE AS NEEDED |

THIRD ANGLE PROJECTION 

ALL DIMS IN mm

EO® **Edmund Optics**®

TITLE: BS VIS 30R/70T 25mm DIA 1MM THK

DWG NO: 35933

SHEET 1 OF 1