


SECTION A-A
SCALE 2:1

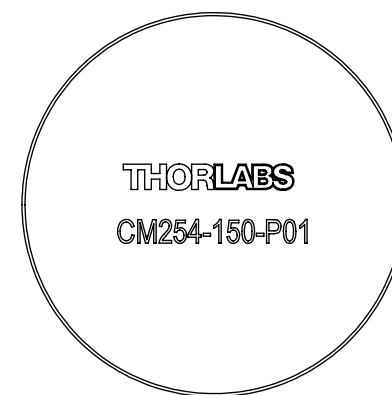

NOTES/SPECIFICATIONS:

1. CLEAR APERTURE: $> \varnothing 22.86\text{mm}$
2. SURFACE IRREGULARITY (S1): $\leq \lambda/4$ AT 633nm OVER CLEAR APERTURE
3. BACK SURFACE (S2): UNIFORM FINE GRIND #12-#20 GRIT
4. SURFACE QUALITY (S1): 40-20 SCRATCH-DIG
5. THICKNESS TOLERANCE: $\pm 0.1\text{ mm}$
6. DIAMETER TOLERANCE: $+0.0/-0.2\text{ mm}$
7. COATING (S1): PROTECTED SILVER
 - Ravg: $>97.5\%$ FROM 450nm-2 μm
 - Ravg: $>96\%$ FROM 2 μm -20 μm
 - AOI: 0° TO 45°

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION			THORLABS www.thorlabs.com	
NAME	DATE	$\varnothing 25.4\text{mm}$, f=150mm CONCAVE PROTECTED SILVER MIRROR		
DRAWN	YB	16/APR/18	MATERIAL	REV
APPROVAL	DD	16/APR/18	N-BK7	A
COPYRIGHT © 2018 BY THORLABS VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUND OFF ERRORS			ITEM #	APPROX WEIGHT
			CM254-150-P01	7.80 g