

NOTES:




1. SUBSTRATE: FLOAT GLASS

2. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2: BBAR (425-700nm)
R(AVG) ≤0.5% @ 425 - 700nm

3. FINE GRIND SURFACE

4. ROHS COMPLIANT

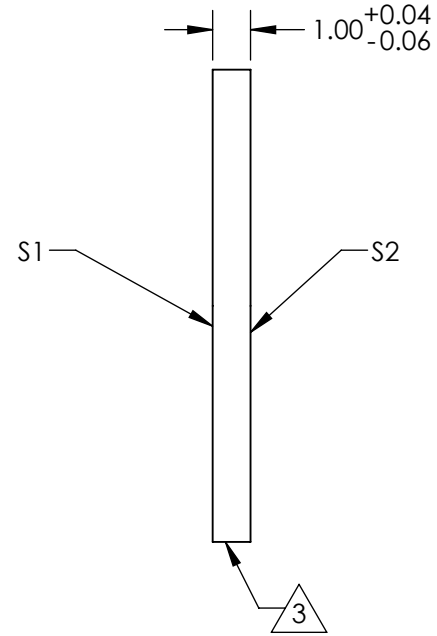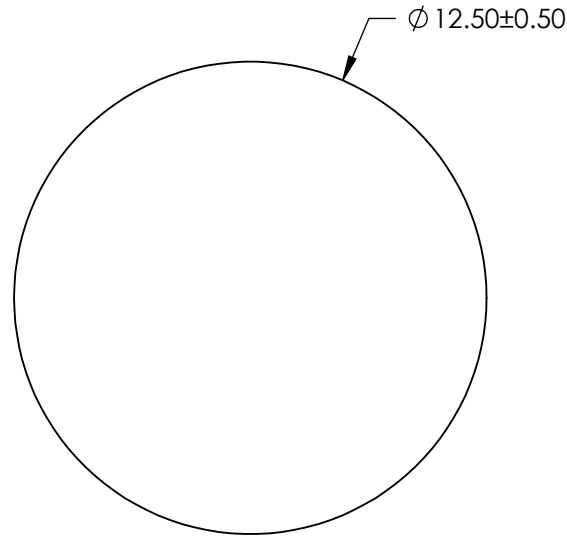

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
Shape	PLANO	PLANO
SURFACE QUALITY	80 - 50	80 - 50
CLEAR APERTURE	$\varnothing 11.25$	$\varnothing 11.25$
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED



ALL DIMS IN mm

EO® Edmund Optics®

TITLE	12.5mm Dia. x 1mm High Efficiency Window		
DWG NO	21324	SHEET	1 OF 4