
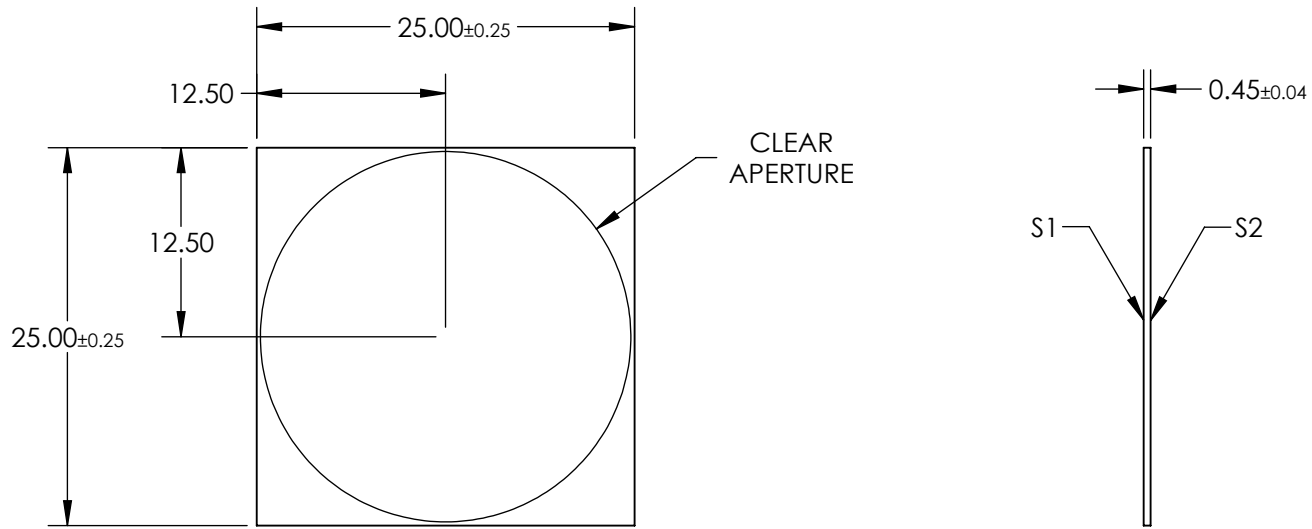


NOTES:

1. SUBSTRATE: D263
2. DIFFRACTION: 5° @ 915nm
3. COATING (APPLY ACROSS COATING APERTURE)
S1 & S2:
R(ABS) < 0.5% @ 915nm
4. GROOVE DENSITY: 95 grooves/mm



**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY



	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	60-40	60-40
CLEAR APERTURE	$\text{Ø}24.5$	$\text{Ø}24.5$
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED



ALL DIMS IN

mm

TITLE

915nm Laser V-Coat, 25mm Square, 5°
Diffraction Polarization Grating

DWG NO

16590

SHEET
1 OF 1