
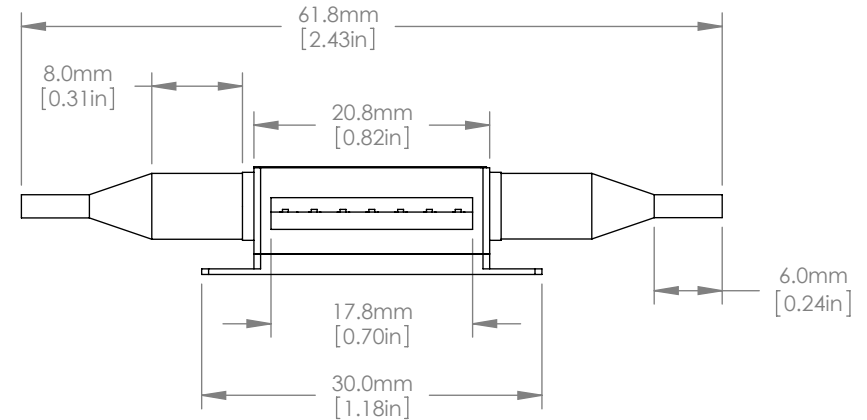


PIN IDENTIFICATION


1.	TEC +	14.	TEC -
2.	Thermistor	13.	Case
3.	NC	12.	NC
4.	NC	11.	Dev Cathode
5.	Thermistor	10.	Dev Anode
6.	NC	9.	NC
7.	NC	8.	NC

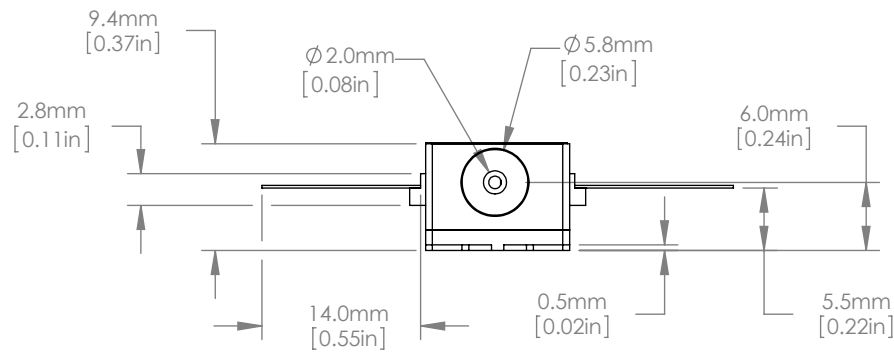

NOTES:

- THE DEVICE IS SUPPLIED WITH 2 ATTACHED FIBER TAILS.
- FIBER TAIL DETAILS:
 - LENGTH: 1.5M.
 - TERMINATION: FC/APC CONNECTORS.
 - FIBER TYPE: CORNING SMF-28e+.

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION			 www.thorlabs.com	
	NAME	DATE		
DRAWN	ND	24/APR/14	Booster Optical Amplifier, 1350nm	
APPROVAL	JW	24/APR/14	MATERIAL	
COPYRIGHT © 2014 BY THORLABS			REV A	
VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUND OFF ERRORS			ITEM #	APPROX WEIGHT
			BOA1036S	.18 kg