

	PART DESCRIPTION	MATERIAL
1	ADHESIVE RING	PLASTIC
2	BANDPASS FILTER	UVFS
3	ENGRAVED HOUSING	ANODIZED ALUMINUM



ISOMETRIC VIEW SCALE 1:1

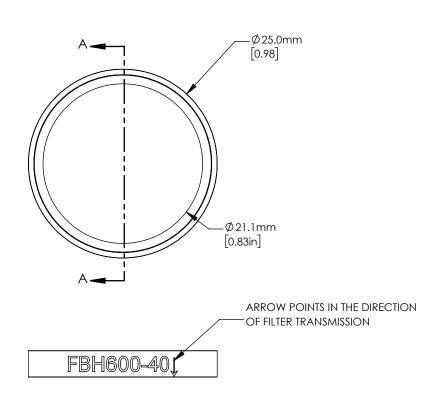

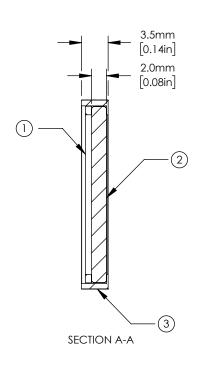

## NOTES/SPECIFICATIONS:

- CLEAR APERTURE: Ø21.1 mm
- 2. TRANSMITTED WAVEFRONT ERROR: ≤158.2 nm RMS OVER CLEAR APERTURE
- 3. SURFACE QUALITY: 60-40 SCRATCH-DIG
- 4. COATING: BANDPASS FILTER, HARDCOATED

TRANSMISSION: >90% AT 600 nm

FWHM: 40 nm

BLOCKING: >OD5 200-571 nm AND 629-1200 nm

0° AOI

FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION THORLABS WWW.thorlabs.com					
	NAME	DATE	PREMIUM BANDPASS FILTER, Ø25.0 mm,		mm.
DRAWN	PH	08/JUL/21	CWL = 600 nm, FWHM = 40 nm		
APPROVAL	GG	23/JUL/21			REV
COPYRIGHT © 2021 BY THORLABS		Y THORLABS	SEE TABLE		Α
VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS			FBH600-40	APPROX WE	IGHT