


NOTES:

1. SUBSTRATE MATERIAL:
N-BK7
2. BEAM DEVIATION: ± 3 arcmin
3. COATING (APPLY ACROSS CLEAR APERTURE)

S1, S2, S3 & S4: R(abs) < 0.25% @ 780nm
 S5: Tp/Ts > 1000:1 @ 780nm
 TRANSMISSION > 95%
 REFLECTION > 99.5%

4. FINE GROUND SURFACE
5. ELEMENTS TO BE CEMENTED WITH NORLAND OPTICAL ADHESIVE 61
6. PROTECTIVE BEVEL AS NEEDED
7. MARK IDENTIFIES BEAMSPLITTER COATING RIGHT ANGLE PRISM

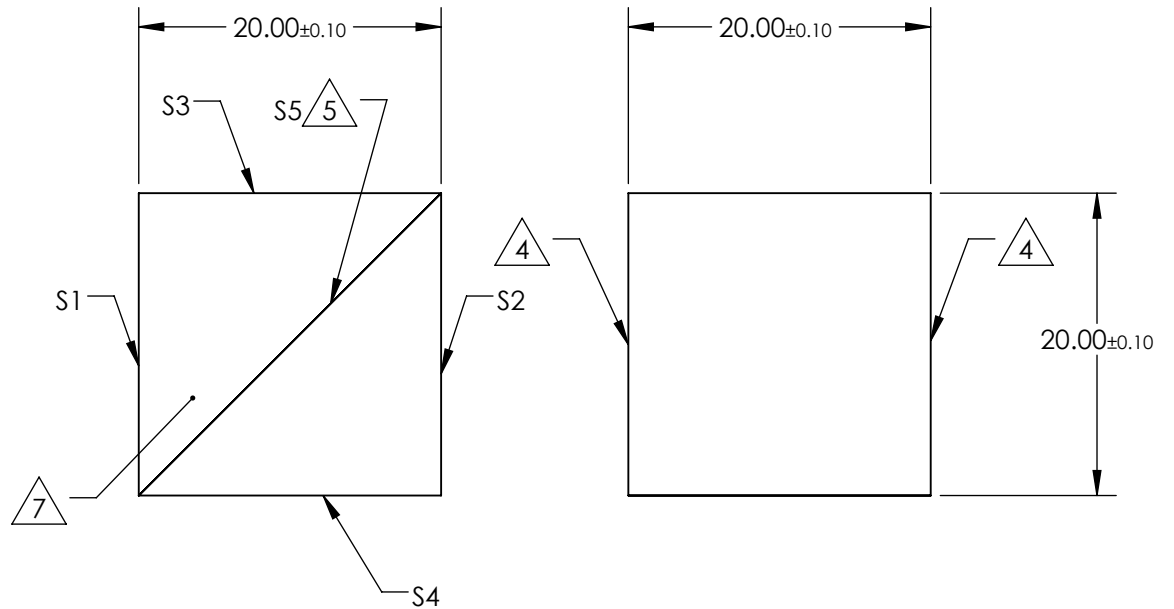

**FOR INFORMATION ONLY:
 DO NOT MANUFACTURE
 PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
 DIMENSIONS ARE FOR REFERENCE ONLY

	S1, S2, S3, S4	S5
SHAPE	PLANO	PLANO
SURFACE FLATNESS	$\lambda/4$	$\lambda/4$
SURFACE QUALITY	40-20	40-20
CLEAR APERTURE	90	90



ALL DIMS IN mm

EO® Edmund Optics®

TITLE

20mm, 780nm, LASER LINE POLARIZING CUBE
 BEAMSPLITTER

DWG NO

47782

SHEET
 1 OF 1